


## 1264 - Vega LED

Code: 420665-07

### GENERAL INFORMATION

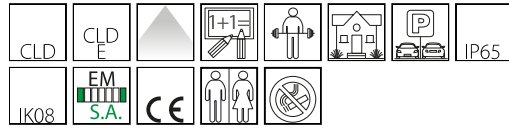

Article	1264 - Vega LED
Code	420665-07

### DIMENSIONS AND WEIGHT

Length (mm)	300 mm
Width (mm)	225 mm
Height (mm)	142 mm
Weight (Kg)	1.840 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-E
Power factor	≥0.9
Insulation class	Class I
Controllability	None




The Vega wall sconce, one of Disano's most popular wall lamps, combines excellent material quality and distinctive design with LED technology, which guarantees energy savings and long life. The unique shape of its housing allows for simple and functional installations. Also available with presence sensor to enhance functionality and service life.



## 1264 - Vega LED

Code: 420665-07

### PHOTOMETRIC DATA

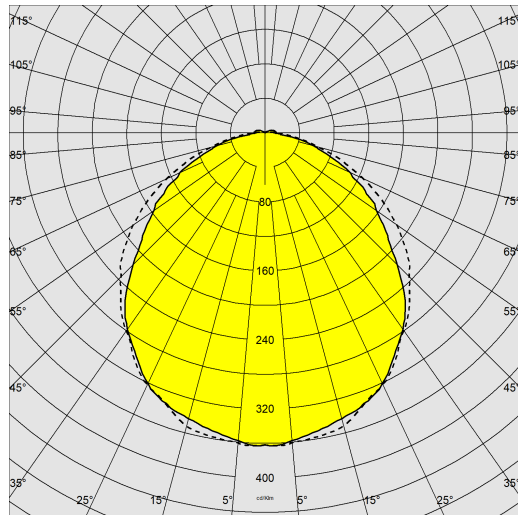

Lighting source	LED
CRI	70
Luminous flux (output) (lm)	1760 lm
Power absorption (total) (W)	12 W
CCT	4000 K
Luminous efficacy (lm/W)	147 lm/W
LED flux maintenance	50000 hr, L 70, B 50


### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65
Ambient temperature - min	5 °C
Ambient temperature - max	35 °C




# 1264 - Vega LED

Code: 420665-07



300

225



142

## DOWNLOAD

### MOUNTS

[AssemblyInstructions 1264 03-23.pdf](#)

### DESIGNS

[TechnicalDrawing 1264.dxf](#)



## MATERIALS AND COLOURS

Housing	thermoplastic material, shatterproof, UV stabilised, RAL7045 grey colour.
Optics	anodised and polished 99.85 aluminium.
Diffuser	in anti-glare matt polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing, externally smooth and dustproof.
Pole connection	0
Colour	Black
Equipment	<ul style="list-style-type: none"> <li>- complete with fixing plate.</li> <li>- EPDM foam bowl gasket.</li> <li>- external screws in galvanised stainless steel with black OR.</li> </ul>

## EMERGENCY LIGHTING

Type of emergency	S.A.
Emergency luminous flux (%)	38
Battery life-recharge	1h

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

## GEAR

Upon request	0
--------------	---

## WARRANTY

After sales warranty	3 yr
----------------------	------

## 1264 - Vega LED

Code: 420665-07



1266 Joint



995140-00 995141-00



995142-00 995143-00

Self-adhesive pictograms - 1260



5 Fibreglass pole