
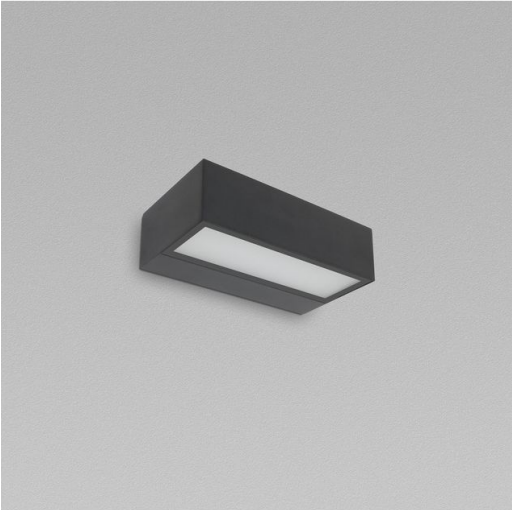


1594 - Horizontal - direct and indirect light

Code: 420674-00

GENERAL INFORMATION

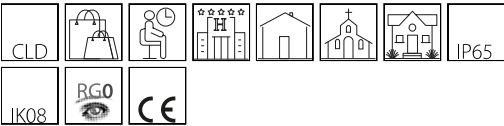

Horizontal is a wall light with a linear design and compact dimensions complete with a special reflector for 'wallwasher' light effects; the high degree of protection (IP65) makes it ideal for indoor and outdoor lighting applications



Article	1594 - Horizontal - direct and indirect light
Code	420674-00

DIMENSIONS AND WEIGHT

Length (mm)	200 mm
Width (mm)	100 mm
Height (mm)	60 mm
Weight (Kg)	0.7 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class I
Controllability	None

1594 - Horizontal - direct and indirect light

Code: 420674-00

PHOTOMETRIC DATA

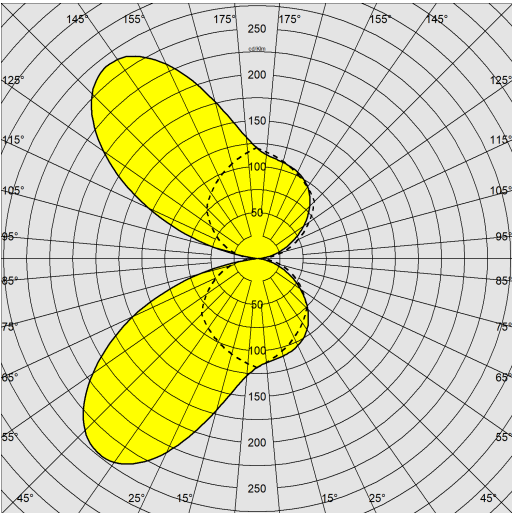

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	670 lm
Power absorption (total) (W)	10 W
CCT	3000 K
Luminous efficacy (lm/W)	67 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



1594 - Horizontal - direct and indirect light

Code: 420674-00

MATERIALS AND COLOURS

Housing	in painted aluminium.
Diffuser	in opal glass.
Colour	Black
Equipment	prepared for wall installation.

EMERGENCY LIGHTING


Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------



DOWNLOAD

MOUNTS
AssemblyInstructions 1594 11-23.pdf

DESIGNS
TechnicalDrawing 1594.dxf

