

1595 - Upright - direct-indirect light

Code: 420676-00

GENERAL INFORMATION



Upright is a wall sconce with a linear and compact dimensions; Its design allows obtaining a soft, evenly distributed glow for direct or indirect lighting. Its high degree of protection (IP65) makes it ideal for indoor and outdoor lighting applications.



Article	1595 - Upright - direct-indirect light
Code	420676-00

DIMENSIONS AND WEIGHT

Length (mm)	95 mm
Width (mm)	67 mm
Height (mm)	165 mm
Weight (Kg)	0.8 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

1595 - Upright - direct-indirect light

Code: 420676-00

PHOTOMETRIC DATA

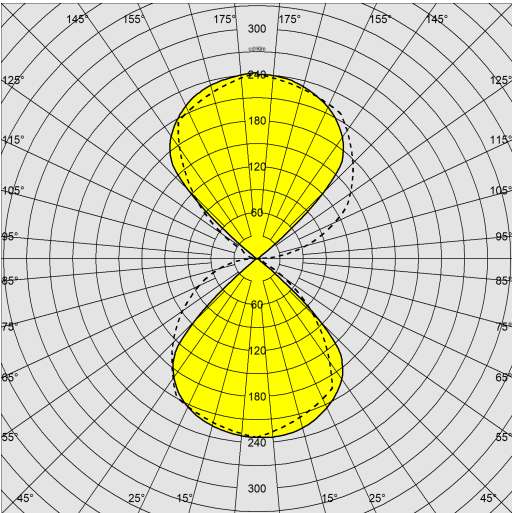

Lighting source	LED COB
CRI	>80
Luminous flux (output) (lm)	940 lm
Power absorption (total) (W)	10 W
CCT	3000 K
Luminous efficacy (lm/W)	94 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	65



1595 - Upright - direct-indirect light

Code: 420676-00

MATERIALS AND COLOURS

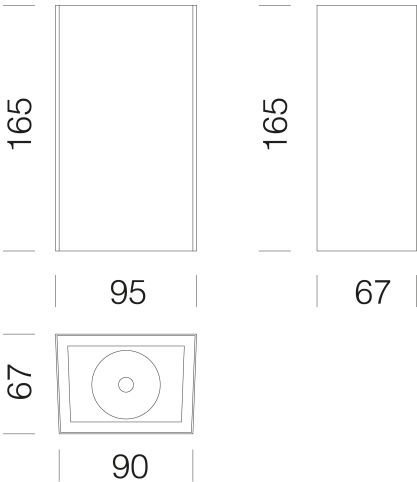

Housing	in painted aluminium.
Diffuser	glass diffuser.
Colour	Black
Equipment	prepared for wall installation.
Luminous flux maintenance 70%: 100.000h (L70B50) o luminous flux maintenance 90%: 50.000h (L90B10).	

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. Hanno grado di protezione secondo la norma EN60529.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

- MOUNTS
- AssemblyInstructions 1595 11-23.pdf
- DESIGNS
- TechnicalDrawing 1595up.dxf

