

1561 - Elfo - DIP SWITCH - FS

Code: 422398-00



A complete product that meets needs and wishes of lighting designers. To be installed with the Pegaso slab.



GENERAL INFORMATION

Article	1561 - Elfo - DIP SWITCH - FS
Code	422398-00

DIMENSIONS AND WEIGHT

Length (mm)	220 mm
Width (mm)	220 mm
Height (mm)	363 mm
Weight (Kg)	3.2 kg

INSTALLATION

Surface exposed to wind (mm)	L 40000 mm², F 40000 mm²
------------------------------	--------------------------


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Rated Current	500 mA
Insulation class	Class II
Controllability	Yes (Integrated)
Integrated Function	Flux/power settings (factory)

1561 - Elfo - DIP SWITCH - FS

Code: 422398-00

PHOTOMETRIC DATA

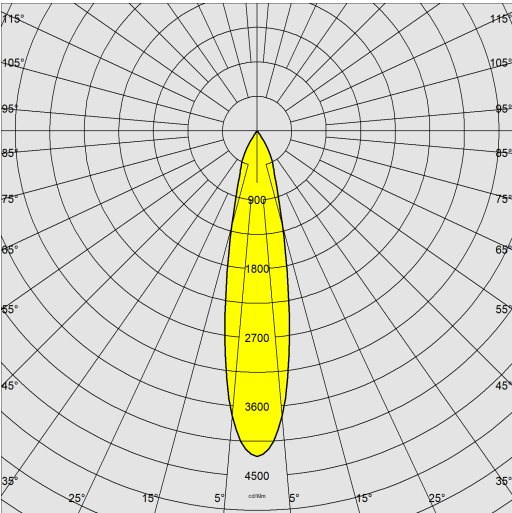

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	3280 lm
Power absorption (total) (W)	26 W
CCT	4000 K
Luminous efficacy (lm/W)	126 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Beam angle	15 °
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



1561 - Elfo - DIP SWITCH - FS

Code: 422398-00

MATERIALS AND COLOURS

DOWNLOAD

MOUNTS

AssemblyInstructions Elfo 03-23.pdf

DESIGNS

TechnicalDrawing 1561.dxf

TechnicalDrawing3D disano 1561 elfo.3ds



Housing	in die-cast aluminium with cooling fins integrated in the cover.
Optics	in high-performance silver-coated aluminium.
Diffuser	tempered glass, 5 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	built-in.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Grey
	L90B10 50000h / L70B50 10000h

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------

1561 - Elfo - DIP SWITCH - FS


Code	Wtot	mA	K - ølm - CRI - °
422398-00	26	500	4000K - 3190lm - CRI 80 - 15°
422398-00	26	700	4000K - 4390lm - CRI 80 - 15°
422398-00	26	900	4000K - 5540lm - CRI 80 - 15°

1561 - Elfo - DIP SWITCH - FS

Code: 422398-00



389 Wall-mount Pegaso slab



388 Pegaso double slab



387 Pegaso single slab