

1570 - Clima - LED

Code: 422401-0016



One of Disano's historic urban amenities lighting products is now available with LEDs and joins the family of products for lighting up parks and gardens where high energy savings and excellent light quality are needed. Equipped with the latest generation of LED modules



GENERAL INFORMATION

| | |
|---------|--------------------|
| Article | 1570 - Clima - LED |
| Code | 422401-0016 |

DIMENSIONS AND WEIGHT

| | |
|-------------------|--------|
| Height (mm) | 428 mm |
| Diameter (Ø) (mm) | 503 mm |
| Weight (Kg) | 5.9 kg |

INSTALLATION

| | |
|-------------------------------------|---|
| Diameter (Ø) of pole connector (mm) | 60-60 mm |
| Surface exposed to wind (mm) | L 121000 mm ² , F 121000 mm ² |


ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|-------------------------------------|-------------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD |
| Power factor | ≥0.9 |
| Rated Current | 350 mA |
| Surge protector (common) (EN 61547) | 6 kV, 10 kV |
| Insulation class | Class II |
| Controllability | None |

1570 - Clima - LED

Code: 422401-0016

PHOTOMETRIC DATA

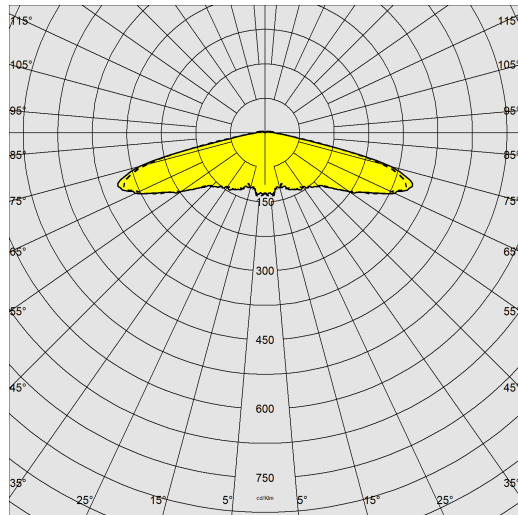

| | |
|------------------------------|--|
| Lighting source | LED |
| CRI | >70 |
| Luminous flux (output) (lm) | 7968 lm |
| Power absorption (total) (W) | 77 W |
| CCT | 4000 K |
| Luminous efficacy (lm/W) | 103 lm/W |
| Low Flicker | luminaire with very low flicker: evenly distributed light for greater visual safety. |
| LED flux maintenance | 100000 hr, L 80, B 10 |

MECHANICAL CHARACTERISTICS


| | |
|-------------------------------|--------|
| Impact resistance rating (IK) | IK08 |
| IP | 65 |
| Ambient temperature - min | -20 °C |
| Ambient temperature - max | 40 °C |



1570 - Clima - LED

Code: 422401-0016

MATERIALS AND COLOURS

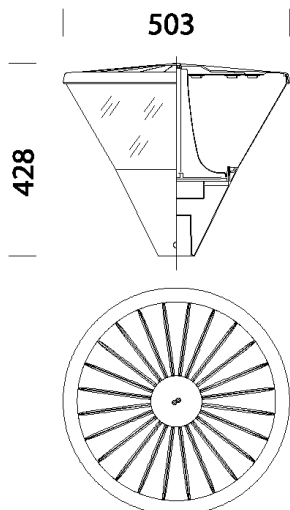

| | |
|--------------------------------|--|
| Housing | in die-cast aluminium, top cover in aluminium. |
| Diffuser | in anti-glare polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, externally smooth and dustproof. |
| Heat sink | built-in. |
| Pole connection | suited for poles with a diameter of 60 mm. |
| Coating | the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint. |
| Special coating (UPON REQUEST) | Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea. |
| Colour | Graphite |
| Equipment | <ul style="list-style-type: none"> - waterproof connector for quick installation with no need to open the fixture. - anti-condensation valve. - temperature controller with auto-reset. - EN 61547 compliant surge protection. - BASIC PROG built-in functions. |

DOWNLOAD

MOUNTS

[AssemblyInstructions polar-clima 10-21.pdf](#)

DESIGNS

[BIM 1570 Clima - LED - 20200616.zip](#)

[TechnicalDrawing 1570.dxf](#)



STANDARDS AND COMPLIANCE


| | |
|------------------------------|--|
| Photobiological safety class | RG0 Ethr |
| Markings and tests | CE |
| Reference standards | EN60598-1. They have a degree of protection according to the EN60529 standard. |
| Energy Label | C |

WARRANTY


| | |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|

1570 - Clima - LED

Code: 422401-0016




303 Connection for \varnothing 60



301 Oliva arm




300 Vert olive




210 Arm




5 Fibreglass pole



1481 steel conical pole to be buried




1480 steel conical pole with base



1477 Urban Pole - with base



1478 Urban Pole to be buried



302 Wall mount



1508 Fluted pole \varnothing 120 with base



1509 Fluted pole \varnothing 120



1408 Fluted pole \varnothing 100 with base



1409 Fluted pole \varnothing 100