

1282 - Meridiana LED

Code: 423095-00



1282 Meridiana LED



GENERAL INFORMATION

Article	1282 - Meridiana LED
Code	423095-00

DIMENSIONS AND WEIGHT

Length (mm)	375 mm
Width (mm)	224 mm
Height (mm)	329 mm
Weight (Kg)	3.105 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

1282 - Meridiana LED

Code: 423095-00

PHOTOMETRIC DATA

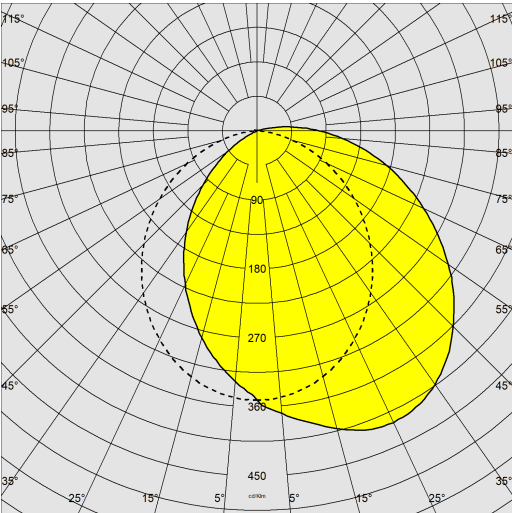

Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	1119 lm
Power absorption (total) (W)	9 W
CCT	4000 K
Luminous efficacy (lm/W)	124 lm/W
LED flux maintenance	50000 hr, L 70, B 20


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	65



1282 - Meridiana LED

Code: 423095-00

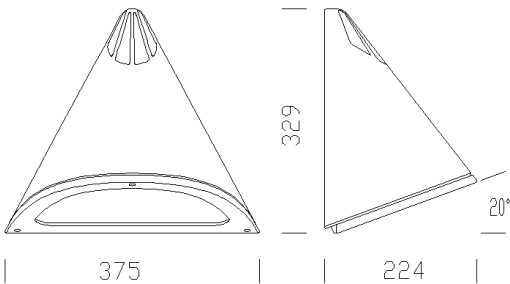

DOWNLOAD

MOUNTS  
AssemblyInstructions meridiana 04-23.pdf

DESIGNS  
TechnicalDrawing 1298.dxf



MATERIALS AND COLOURS

Housing	in die-cast aluminium.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Colour	Grey
Equipment	<ul style="list-style-type: none"><li>- during installation the frame stays attached via a safety hinge mechanism that prevents it from dropping down accidentally.</li><li>- with wall mounting plate.</li><li>- gasket in eco-friendly material.</li></ul>

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

1282 - Meridiana LED

Code: 423095-00

