

Code: 423096-00

								IP65	IK08



Article	1282 - Meridiana
Code	423096-00


Length (mm)	375 mm
Width (mm)	224 mm
Height (mm)	329 mm
Weight (Kg)	3.1 kg

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

1282 - Meridiana

Code: 423096-00

PHOTOMETRIC DATA

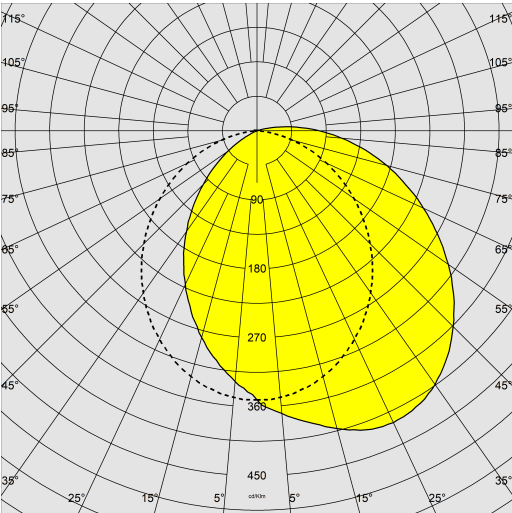

Lighting source	LED
CRI	70
Luminous flux (output) (lm)	1119 lm
Power absorption (total) (W)	8 W
CCT	4000 K
Luminous efficacy (lm/W)	140 lm/W
LED flux maintenance	50000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



1282 - Meridiana

Code: 423096-00

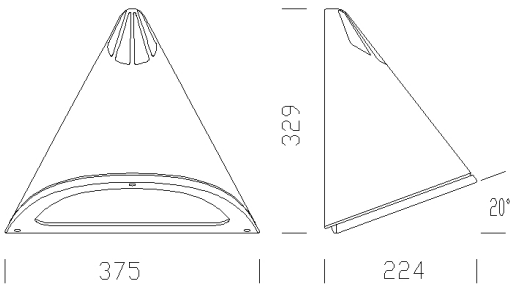

DOWNLOAD

MOUNTS

AssemblyInstructions meridiana 04-23.pdf

DESIGNS

TechnicalDrawing 1298.dxf



MATERIALS AND COLOURS

Housing	in die-cast aluminium.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Graphite
Equipment	- during installation the frame stays attached via a safety hinge mechanism that prevents it from dropping down accidentally. - with wall mounting plate. - gasket in eco-friendly material.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

1282 - Meridiana

Code: 423096-00

