


1282 - Meridiana LED

Code: 423097-00

GENERAL INFORMATION

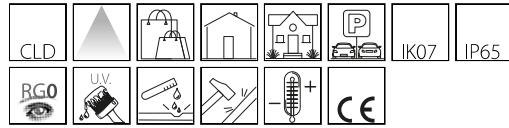

Article	1282 - Meridiana LED
Code	423097-00

DIMENSIONS AND WEIGHT

Length (mm)	375 mm
Width (mm)	224 mm
Height (mm)	329 mm
Weight (Kg)	3.025 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None




1282 Meridiana LED



1282 - Meridiana LED

Code: 423097-00

PHOTOMETRIC DATA

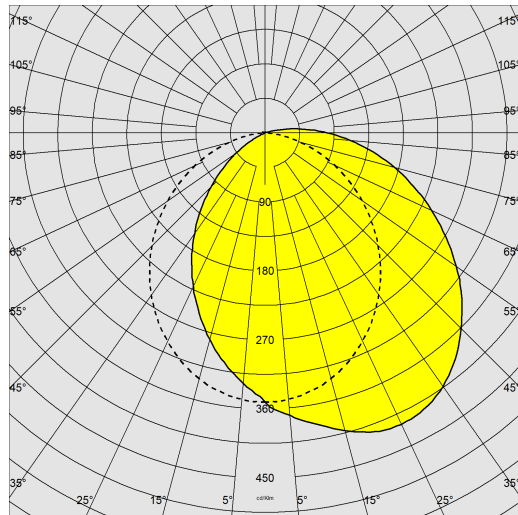

Lighting source	LED
Luminous flux (output) (lm)	1990 lm
Power absorption (total) (W)	17 W
CCT	4000 K
Luminous efficacy (lm/W)	117 lm/W
LED flux maintenance	50000 hr, L 70, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



1282 - Meridiana LED

Code: 423097-00

MATERIALS AND COLOURS

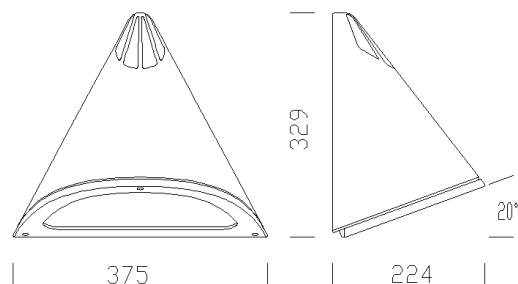

Housing	in die-cast aluminium.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Colour	Grey
Equipment	<ul style="list-style-type: none"> - during installation the frame stays attached via a safety hinge mechanism that prevents it from dropping down accidentally. - with wall mounting plate. - gasket in eco-friendly material.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

DOWNLOAD

MOUNTS

[AssemblyInstructions meridiana 04-23.pdf](#)

DESIGNS

[BIM 1282 Meridiana LED - 20200224.zip](#)

[TechnicalDrawing 1298.dxf](#)




WARRANTY

After sales warranty	3 yr
----------------------	------

1282 - Meridiana LED

Code: 423097-00



96 Connection for $\varnothing 60$ - Meridiana