


## 1774 - Amalfi

Code: 424241-00

### GENERAL INFORMATION

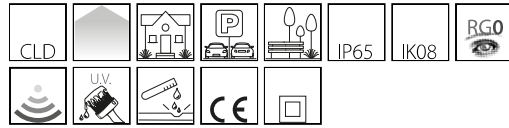

Article	1774 - Amalfi
Code	424241-00

### DIMENSIONS AND WEIGHT

Height (mm)	94 mm
Diameter (Ø) (mm)	246 mm
Weight (Kg)	1.8 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class II
Controllability	None



A product that represents the evolution of classic spherical lighting fixtures, which have become obsolete and are not in line with light pollution regulations. Amalfi allows optimal light distribution without upward dispersion and offers the performance of high-efficiency LED sources, with excellent colour rendering. Perfectly fitting into any context, thanks to the quality of the materials and the design features studied for the perfect functioning of the LEDs, the luminaire guarantees a long life.


Its practical design makes it ideal for mounting on all poles with ø60mm connection, and thanks to the supplied plug-in cable, electrical wiring is simple and instant.



# 1774 - Amalfi

Code: 424241-00

## PHOTOMETRIC DATA

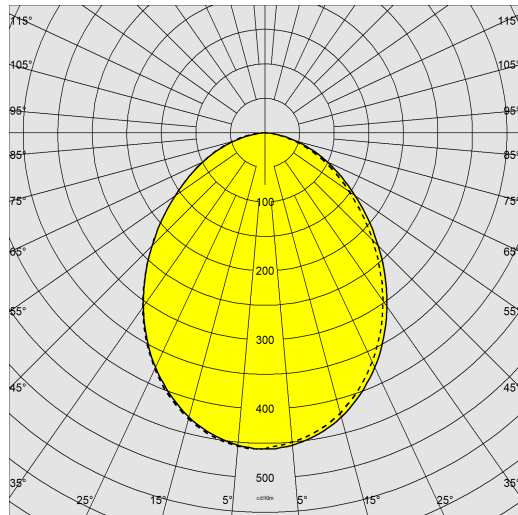

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	1100 lm
Power absorption (total) (W)	9 W
CCT	4000 K
Luminous efficacy (lm/W)	122 lm/W
LED flux maintenance	50000 hr, L 80, B 20

## MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	65



## 1774 - Amalfi

Code: 424241-00

### MATERIALS AND COLOURS

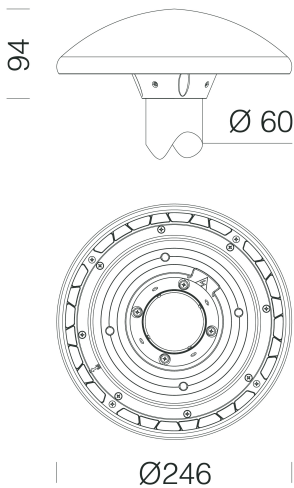

Housing	in die-cast aluminium. For poles with a diameter of 60 mm.
Diffuser	in polycarbonate, transparent, anti-glare, shatterproof and V2 self-extinguishing, UV stabilised.
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Anthracite
Equipment	complete with waterproof connector for line connection.

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions 1774 03-23.pdf](#)

#### DESIGNS

[TechnicalDrawing 1774n.dxf](#)



### WARRANTY

After sales warranty 3 yr

## 1774 - Amalfi

---

Code: 424241-00



5 Fibreglass pole