

1480 - steel conical pole with base

Code: 425086-00

GENERAL INFORMATION



Article	1480 - steel conical pole with base
Code	425086-00

DIMENSIONS AND WEIGHT

Weight (Kg)	25 kg
-------------	-------



1480 palo conico in acciaio con base




1480 - steel conical pole with base

Code: 425086-00



1480 - steel conical pole with base

Code: 425086-00

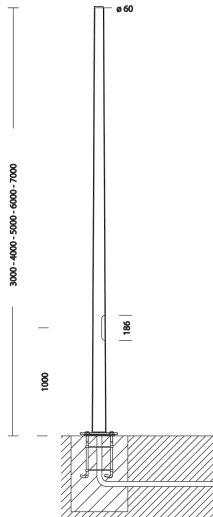

DOWNLOAD

MOUNTS

AssemblyInstructions 1480-1481 09-18.pdf

DESIGNS

TechnicalDrawing 1480b.dxf

TechnicalDrawing3D disano 1480 tapered pole 7m.3ds



MATERIALS AND COLOURS

Housing	Hot-rolled steel, ø60 mast-top connection. Version with the base requires the purchase of 4 anchor bolts to be buried. With 2 x 16A fuses, removable 4-pole/3-way terminal block = 10mm2 and 2.5 mm2 shunt. Standard with Insulation Class II.
Pole connection	0
Coating	thermoset polyester powder coated.
Colour	Anthracite

STANDARDS AND COMPLIANCE


Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

WARRANTY


After sales warranty	0 yr
----------------------	------

1480 - steel conical pole with base

Code: 425086-00

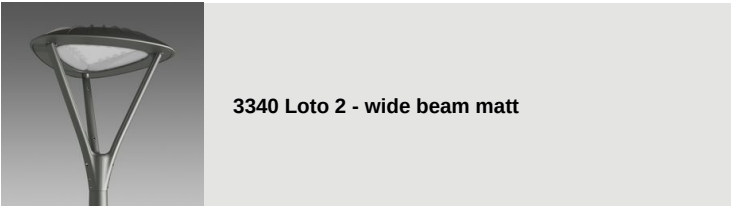

3340 Loto 2 - wide beam matt

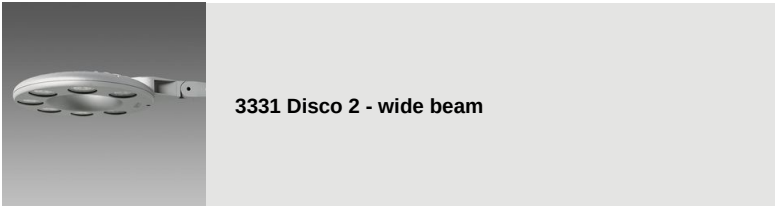

3331 Disco 2 - wide beam



3285 Rolle - high performance



3286 Rolle - high performance



1518 Clima LED against light pollution




1570 Clima - LED



3590 Ischia - rotosymmetric wide beam RW




3590 Ischia MIDNIGHT - rotosymmetric wide beam RW

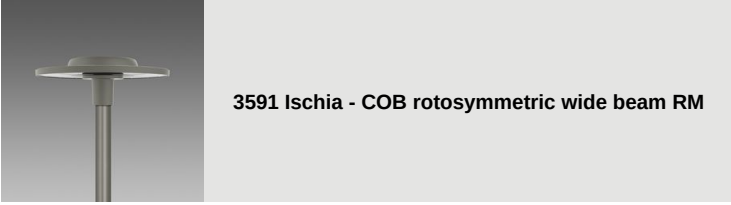

3591 Ischia - COB rotosymmetric wide beam RM



3591 Ischia MIDNIGHT - COB rotosymmetric wide beam RM

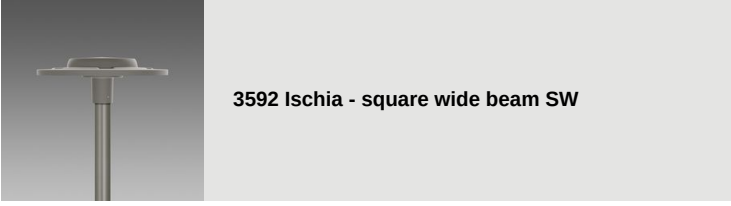

3592 Ischia - square wide beam SW



3592 Ischia MIDNIGHT - square wide beam SW



3596 Ischia MIDNIGHT - asymmetric wide beam AW




3594 Ischia - cycle-pedestrian asymmetric CS


1480 - steel conical pole with base

Code: 425086-00

	3594 Ischia MIDNIGHT - cycle pedestrian symmetric CS		3595 Ischia MIDNIGHT - asymmetric medium beam AM
	3593 Ischia - cycle-pedestrian asymmetric CA		3593 Ischia MIDNIGHT - cycle-pedestrian asymmetric CA
	3596 Ischia - asymmetric wide beam AW		3595 Ischia - asymmetric medium beam AM
	3360 Iseo 1 - roto-symmetric		3361 Iseo 2 - street
	3362 Iseo 3 - centre street		3363 Iseo 4 - cycle lane
	3383 Como 1 - roto-symmetric		3384 Como 2 - asymmetric
	3385 Como 3 - cycle lane		3386 Como 4 - bi-asymmetric
	3350 Garda 1 - roto-symmetric		3351 Garda 2 - asymmetric

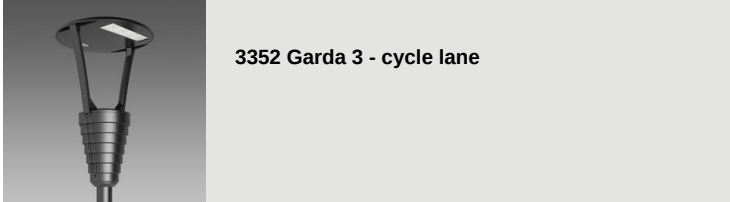

3352 Garda 3 - cycle lane

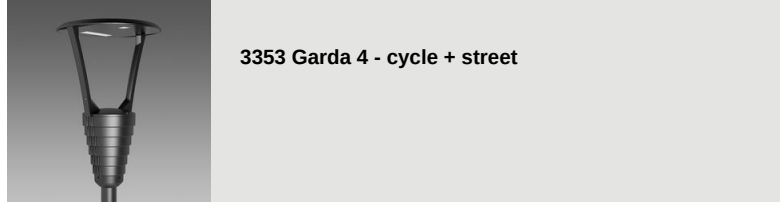


3353 Garda 4 - cycle + street




3355 Garda 5 - roto-symmetric




3355 Garda 6 - roto-symmetric

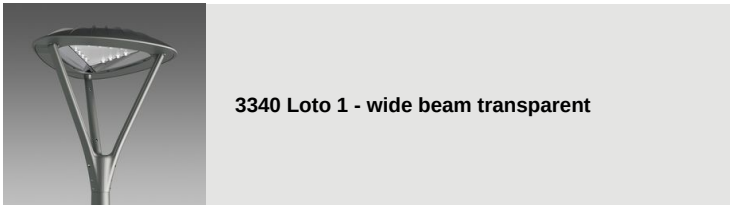

3340 Loto 1 - wide beam transparent

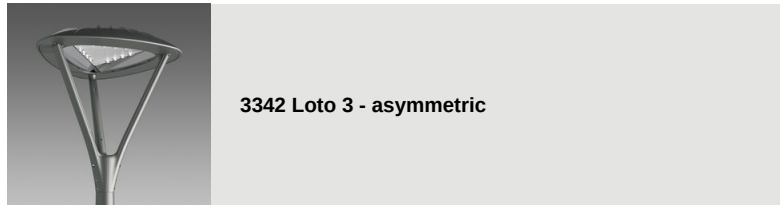


3342 Loto 3 - asymmetric

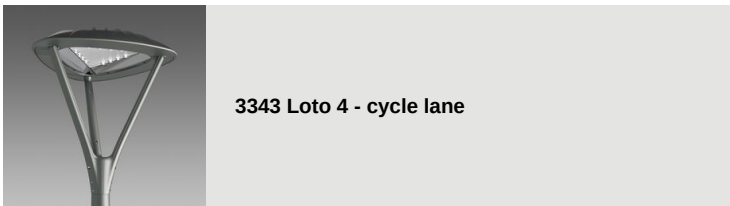


3343 Loto 4 - cycle lane




3344 Loto 5 - wide beam

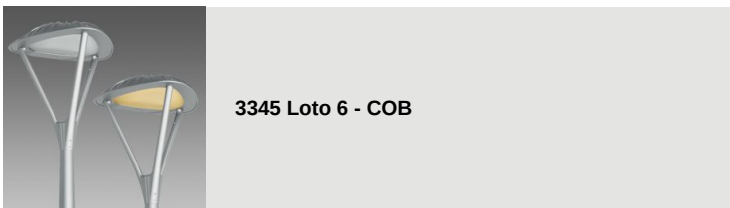


3345 Loto 6 - COB

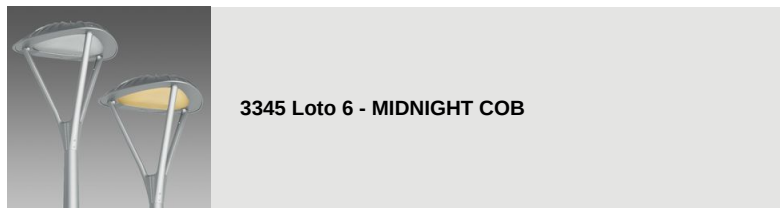


3345 Loto 6 - MIDNIGHT COB

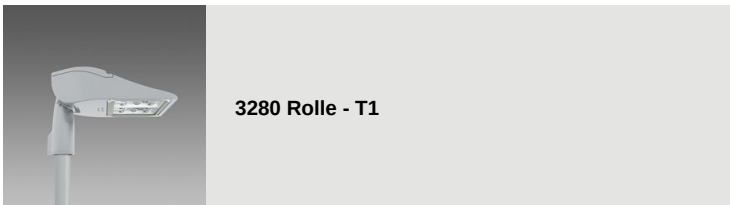


3280 Rolle - T1

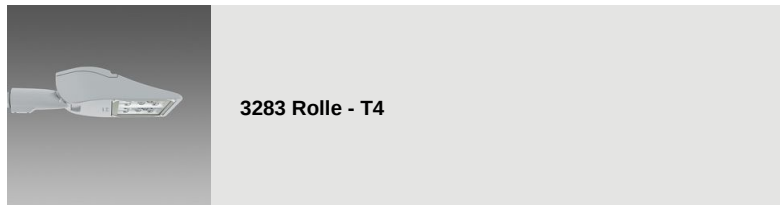

3283 Rolle - T4

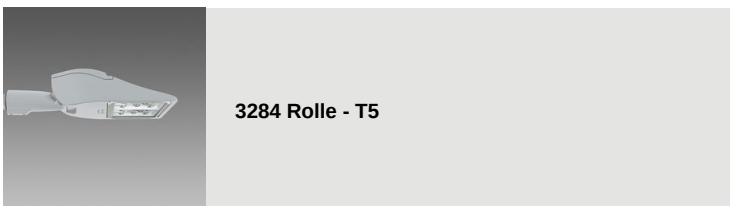

3284 Rolle - T5

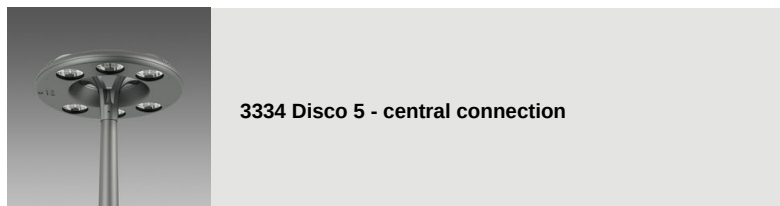

3334 Disco 5 - central connection



3336 Visconti 2.0 - roto-symmetric




3337 Visconti 2.0 - street ME



3338 Visconti 2.0 - cycle lane



3339 Visconti 2.0 - large areas

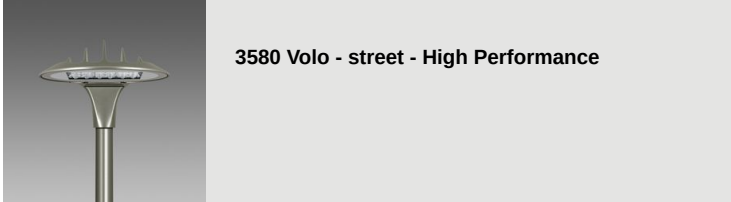

3580 Volo - street - High Performance



3581 Volo - cycle + street



3582 Volo - cycle lane




3583 Volo - roto-symmetric



3281 Rolle - T2



3282 Rolle - T3



1513 Torcia LED COB



1707 Torcia LED



1708 Torcia LED



1205 Polar

Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Saturday, March 2, 2024