


## 1481 - steel conical pole to be buried

Code: 425160-00

### GENERAL INFORMATION



Article	1481 - steel conical pole to be buried
Code	425160-00

### DIMENSIONS AND WEIGHT

Weight (Kg)	18 kg
-------------	-------



1481 palo conico in acciaio da interrare



## 1481 - steel conical pole to be buried

---


Code: 425160-00



# 1481 - steel conical pole to be buried

Code: 425160-00

## MATERIALS AND COLOURS

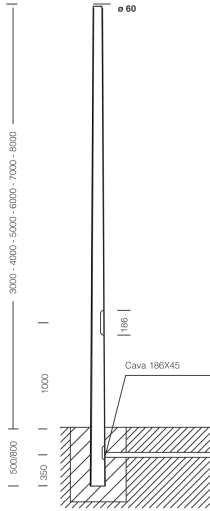

Housing	Hot-rolled steel, $\varnothing 60$ mast-top connection. With 2 x 16A fuses, removable 4-pole/3-way terminal block = 10mm <sup>2</sup> and 2.5 mm <sup>2</sup> shunt. Supplied as standard with Insulation Class II.
Pole connection	0
Coating	thermoset polyester powder coated.
Colour	Anthracite

## STANDARDS AND COMPLIANCE

Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

## WARRANTY

After sales warranty	0 yr
----------------------	------

## DOWNLOAD

### MOUNTS

[AssemblyInstructions 1480-1481 09-18.pdf](#)

### DESIGNS







[TechnicalDrawing 1481c.dxf](#)

[TechnicalDrawing3D disano 1481 tapered pole 7m.3ds](#)



## 1481 - steel conical pole to be buried

Code: 425160-00

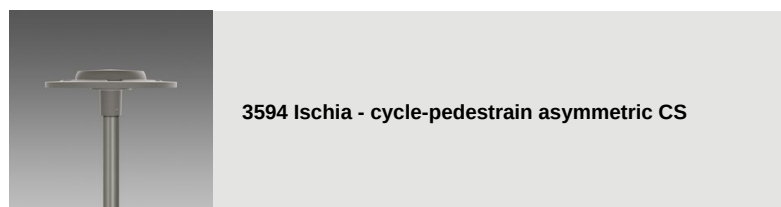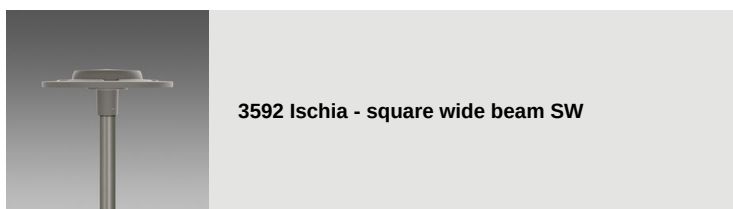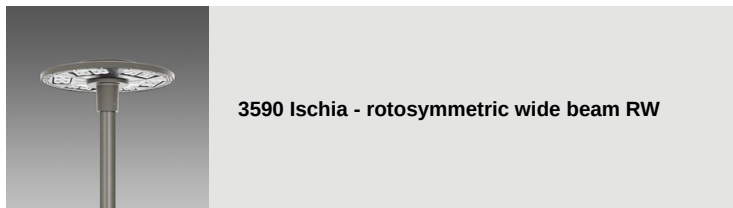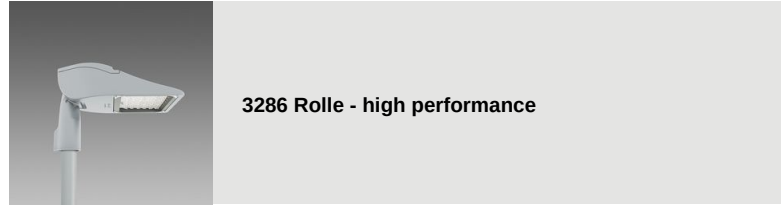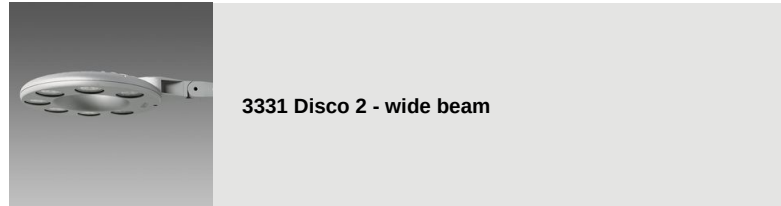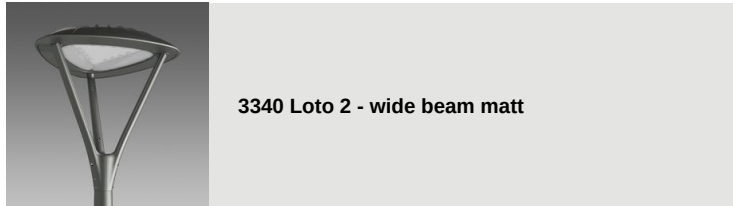

## 1481 - steel conical pole to be buried

Code: 425160-00



**3594 Ischia MIDNIGHT - cycle pedestrian symmetric CS**



**3595 Ischia MIDNIGHT - asymmetric medium beam AM**



**3593 Ischia - cycle-pedestrian asymmetric CA**




**3593 Ischia MIDNIGHT - cycle-pedestrian asymmetric CA**




**3596 Ischia - asymmetric wide beam AW**




**3595 Ischia - asymmetric medium beam AM**




**3360 Iseo 1 - roto-symmetric**



**3361 Iseo 2 - street**




**3362 Iseo 3 - centre street**



**3363 Iseo 4 - cycle lane**



**3383 Como 1 - roto-symmetric**



**3384 Como 2 - asymmetric**



**3385 Como 3 - cycle lane**



**3386 Como 4 - bi-asymmetric**



**3350 Garda 1 - roto-symmetric**



**3351 Garda 2 - asymmetric**



**3352 Garda 3 - cycle lane**



**3353 Garda 4 - cycle + street**



**3355 Garda 5 - roto-symmetric**




**3355 Garda 6 - roto-symmetric**



**3340 Loto 1 - wide beam transparent**



**3342 Loto 3 - asymmetric**



**3343 Loto 4 - cycle lane**



**3344 Loto 5 - wide beam**



**3345 Loto 6 - COB**



**3345 Loto 6 - MIDNIGHT COB**



**3280 Rolle - T1**



**3283 Rolle - T4**



**3284 Rolle - T5**



**3334 Disco 5 - central connection**



**3336 Visconti 2.0 - roto-symmetric**



**3337 Visconti 2.0 - street ME**



**3338 Visconti 2.0 - cycle lane**



**3339 Visconti 2.0 - large areas**



**3580 Volo - street - High Performance**



**3581 Volo - cycle + street**



**3582 Volo - cycle lane**



**3583 Volo - roto-symmetric**



**3281 Rolle - T2**




**3282 Rolle - T3**



**1513 Torcia LED COB**



**1707 Torcia LED**



**1708 Torcia LED**



**1205 Polar**



Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Saturday, March 2, 2024