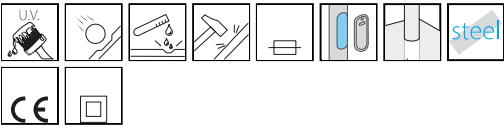


1478 - Urban Pole to be buried

Code: 425370-00



Hot-dip galvanised steel poles. With hole for insertion of power supply cable, pole-head connection, Ø60.



GENERAL INFORMATION

Article	1478 - Urban Pole to be buried
Code	425370-00

DIMENSIONS AND WEIGHT

Weight (Kg)	50 kg
-------------	-------

INSTALLATION

Diameter (Ø) of pole connector (mm)	60-60 mm
-------------------------------------	----------

1478 - Urban Pole to be buried

Code: 425370-00



1478 - Urban Pole to be buried

Code: 425370-00

MATERIALS AND COLOURS

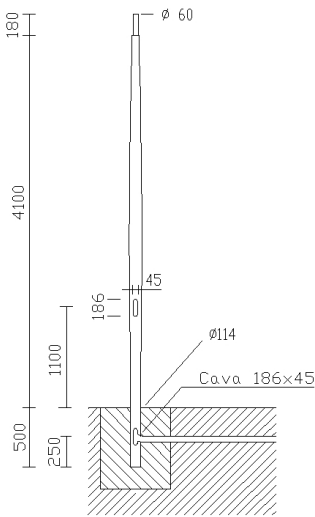
Housing	Steel, semi-cylindrical cross-section. Complete with 2 x 16A fuses, removable terminal block. Designed with hole for power cable entry, with ø60 mast-top connection.
Pole connection	60 mm
Coating	thermoset polyester powder coated.
Colour	Grey9007

STANDARDS AND COMPLIANCE

Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

WARRANTY

After sales warranty	0 yr
----------------------	------



DOWNLOAD

MOUNTS

AssemblyInstructions 1440-1441-1477-1478 10-13.pdf

DESIGNS






TechnicalDrawing 1478.dxf

TechnicalDrawing3D disano 1478 urban 6m.3ds



1478 - Urban Pole to be buried

Code: 425370-00

	210 Arm		215 Tie rod
	211 Sector connector		381 Short arm
	212 Joint ring		303 Connection for $\varnothing$ 60
	304 Threaded connection		327 Arm
	213 Long banner connection		328 Arm
	300 Oliva		214 Short banner connection