

## 1335 - Globo LED against light pollution

Code: 425600-39

### GENERAL INFORMATION



Article	1335 - Globo LED against light pollution
Code	425600-39

### DIMENSIONS AND WEIGHT

Height (mm)	520 mm
Diameter (Ø) (mm)	400 mm
Weight (Kg)	3.3 kg

### INSTALLATION

Surface exposed to wind (mm)	L 140000 mm <sup>2</sup> , F 140000 mm <sup>2</sup>
------------------------------	---

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Surge protector (common) (EN 61547)	10 kV, 10 kV
Insulation class	Class II
Controllability	None




Globo: in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing. Excellent transparency for good light transmission. Upper part painted to comply with light pollution regulations.



## 1335 - Globo LED against light pollution

Code: 425600-39

### PHOTOMETRIC DATA

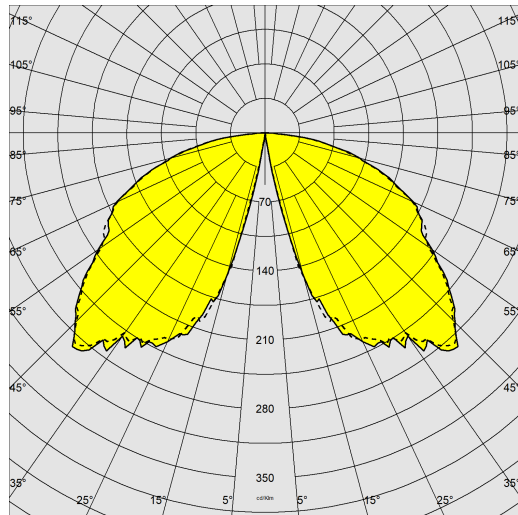

Distribution type	Spherical wide beam
Lighting source	LED
CRI	80
Luminous flux (output) (lm)	1971 lm
Power absorption (total) (W)	29 W
CCT	3000 K
Luminous efficacy (lm/W)	68 lm/W
LED flux maintenance	50000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	65



# 1335 - Globo LED against light pollution

Code: 425600-39

## MATERIALS AND COLOURS

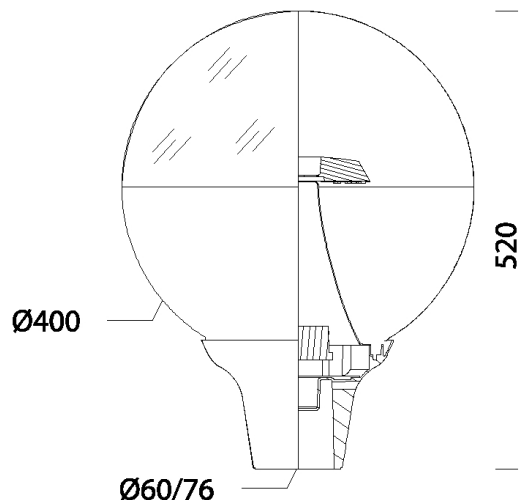

Housing	central cone: black-coated aluminium to protect against light pollution. For poles with a diameter of 60 mm.
Diffuser	in polycarbonate, transparent, anti-glare, shatterproof and V2 self-extinguishing, UV stabilised.
Ground connection (base)	in die-cast aluminium.
Colour	Grey9007
Equipment	<ul style="list-style-type: none"> <li>- complete with waterproof connector for line connection.</li> <li>- anti-condensation valve.</li> <li>- temperature controller with auto-reset.</li> <li>- EN 61547 compliant surge protection.</li> </ul>

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

## DOWNLOAD

### MOUNTS

[AssemblyInstructions globo 04-23.pdf](#)

### DESIGNS

[TechnicalDrawing 1335.dxf](#)



## WARRANTY

After sales warranty	3 yr
----------------------	------

## 1335 - Globo LED against light pollution

---

Code: 425600-39



5 Fibreglass pole