


## 1491 - Pole to be buried

Code: 426153-00

### GENERAL INFORMATION



Article	1491 - Pole to be buried
Code	426153-00

### DIMENSIONS AND WEIGHT

Weight (Kg)	0 kg
-------------	------



1491 Palo da interrare



## 1491 - Pole to be buried

---

Code: 426153-00



# 1491 - Pole to be buried

Code: 426153-00

## MATERIALS AND COLOURS


Housing	Galvanised steel. With removable 4-pole 16mm <sup>2</sup> terminal block with 2 x 16A fuses. With insulation class II. Available in the following colours upon request: RAL3003, 5011, 7026, 9011, 8015, 7024, 7016, 9006, 7037, 6004, 6011, 9010.
Pole connection	0
Coating	thermoset polyester powder coated.
Colour	Graphite

## STANDARDS AND COMPLIANCE

Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

## WARRANTY

After sales warranty	0 yr
----------------------	------

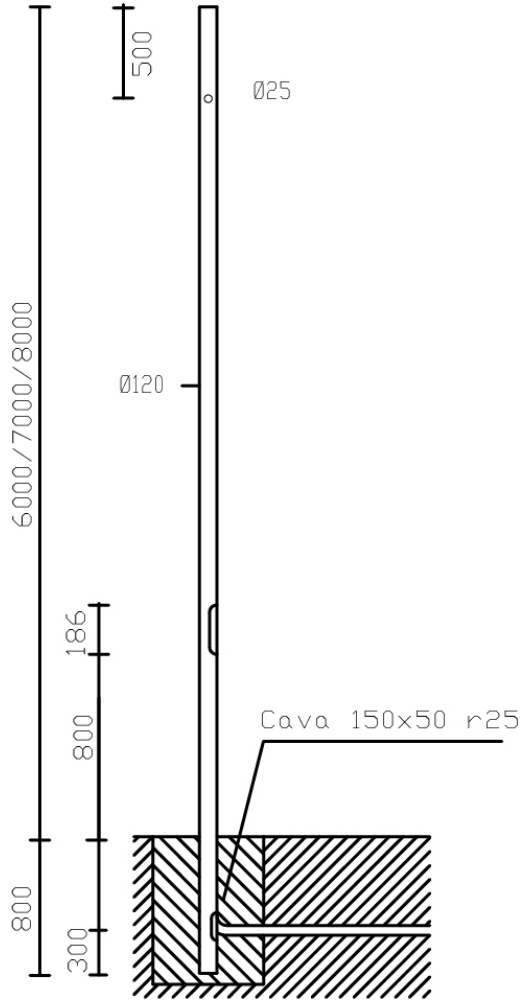

## DOWNLOAD

### MOUNTS

[AssemblyInstructions 1491-1493.pdf](#)

### DESIGNS


[TechnicalDrawing 1491.dxf](#)

[TechnicalDrawing3D disano 1491 pole 8m.3ds](#)







## 1491 - Pole to be buried

Code: 426153-00

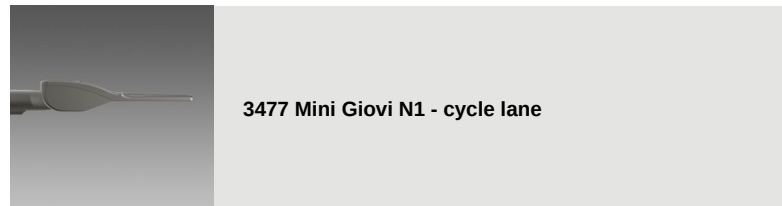

## 1491 - Pole to be buried

Code: 426153-00

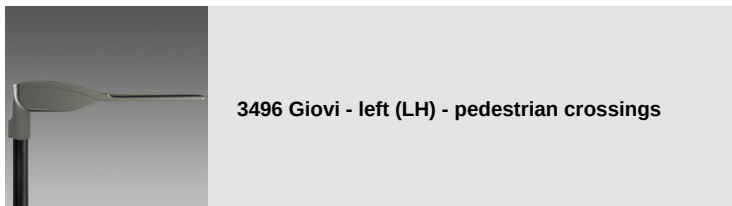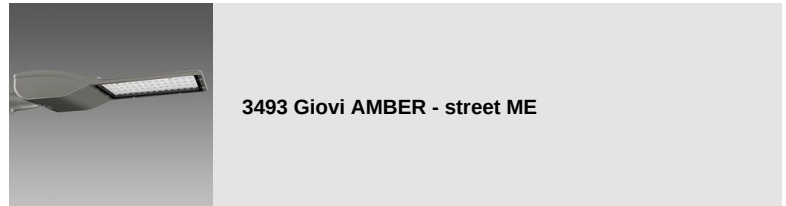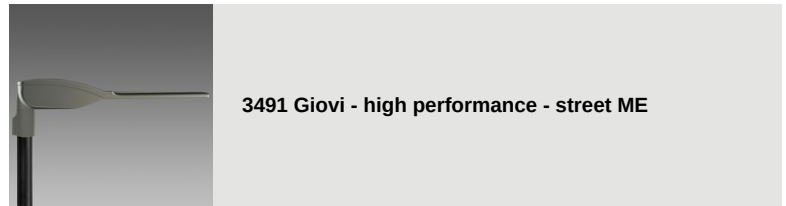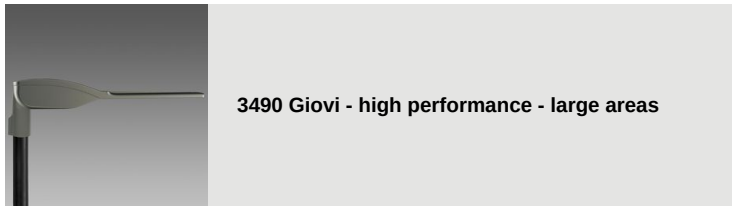



**3291 Sella 1 - STWB**



**3292 Sella 1 - asymmetric 45°**



**3293 Sella 1 - asymmetric 60°**



**3294 Sella 1 - cycle lanes**



**3295 Sella 1 - large areas**



**3296 Sella 1 - HP**



**3297 Sella 1 - HP -pedestrian crossings LH**



**3298 Sella 1 - HP -pedestrian crossings RH**



**3390 Sella 2 - ST**



**3391 Sella 2 - STWB**



**3392 Sella 2 - asymmetric 45°**



**3393 Sella 2 - asymmetric 60°**



**3395 Sella 2 - large areas**



**3396 Sella 2 - HP**



**3270 Stelvio 1 - Plus - LED**



**3274 Stelvio 2 - Plus - LED asymmetric**



**3370 Stelvio - high performance - street**



**3374 Stelvio - high performance - large areas**



3475 Mini Giovi W1 - street



3275 Mini Stelvio - street



3276 mini Stelvio - asymmetric

*Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Saturday, March 2, 2024*