

1408 - Fluted pole ø 100 with base

Code: 426324-00



1408 Palo rigato ø100 con base



GENERAL INFORMATION

|         |                                    |
|---------|------------------------------------|
| Article | 1408 - Fluted pole ø 100 with base |
| Code    | 426324-00                          |

DIMENSIONS AND WEIGHT

|             |       |
|-------------|-------|
| Weight (Kg) | 12 kg |
|-------------|-------|

INSTALLATION

|                                     |          |
|-------------------------------------|----------|
| Diameter (Ø) of pole connector (mm) | 60-60 mm |
|-------------------------------------|----------|

## 1408 - Fluted pole ø 100 with base

---


Code: 426324-00



1408 - Fluted pole ø 100 with base

Code: 426324-00

MATERIALS AND COLOURS

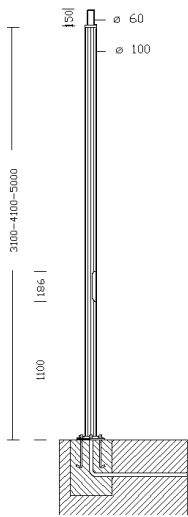

|                 |   |
|-----------------|---|
| Housing         | Fluted extruded aluminium, anodised by tin electroplating, 15/20µ thick. Aluminium inspection window, with 2 x 16A fuses, 4-pole/3-way terminal block = 10 mm2 shunt 2.5 mm2. Insulation Class II. Requires the purchase of 4 anchor bolts. |
| Pole connection | 60mm  |
| Coating         | anodised by tin electroplating, 15/20µ thick, natural oxidised colour or graphite painted.  |
| Colour          | Graphite  |

STANDARDS AND COMPLIANCE

|                    |   |
|--------------------|---|
| Markings and tests | CE  |
| Laboratory Tests   | The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1. |

WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 0 yr |
|----------------------|------|

DOWNLOAD

MOUNTS

AssemblyInstructions 1408-1409.pdf















DESIGNS

TechnicalDrawing 1408.dxf



















1408 - Fluted pole ø 100 with base


Code: 426324-00

|  |  |   |   |
|--|--|---|---|
|    | 1777 Musa LED cycle-pedestrian                       |    | 1779 Musa LED   |
|    | 3590 Ischia - rotosymmetric wide beam RW             |    | 3590 Ischia MIDNIGHT - rotosymmetric wide beam RW     |
|    | 3591 Ischia - COB rotosymmetric wide beam RM         |    | 3591 Ischia MIDNIGHT - COB rotosymmetric wide beam RM |
|   | 3592 Ischia - square wide beam SW                    |   | 3592 Ischia MIDNIGHT - square wide beam SW            |
|  | 3596 Ischia MIDNIGHT - asymmetric wide beam AW       |  | 3594 Ischia - cycle-pedestrian asymmetric CS          |
|  | 3594 Ischia MIDNIGHT - cycle pedestrian symmetric CS |  | 3595 Ischia MIDNIGHT - asymmetric medium beam AM      |
|  | 3593 Ischia - cycle-pedestrian asymmetric CA         |  | 3593 Ischia MIDNIGHT - cycle-pedestrian asymmetric CA |


1408 - Fluted pole ø 100 with base

Code: 426324-00

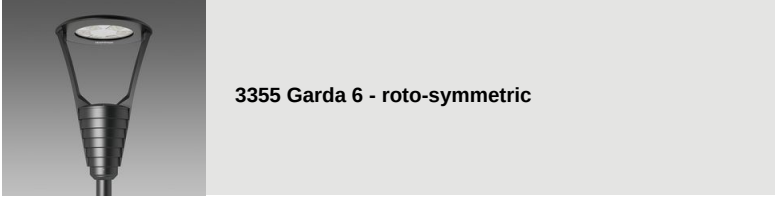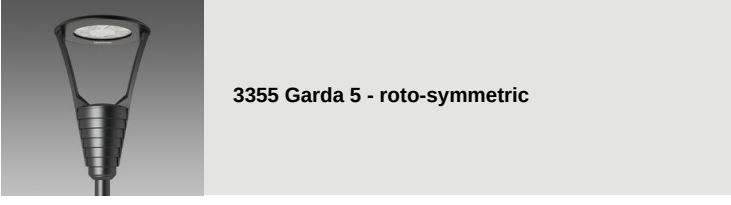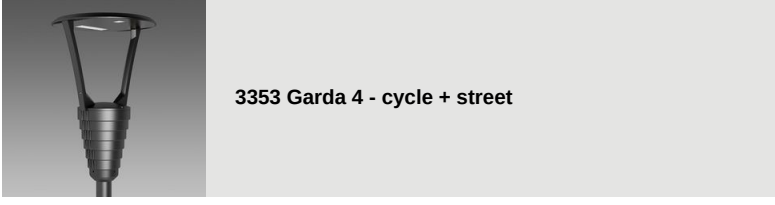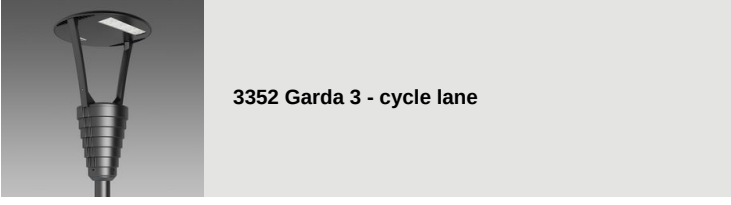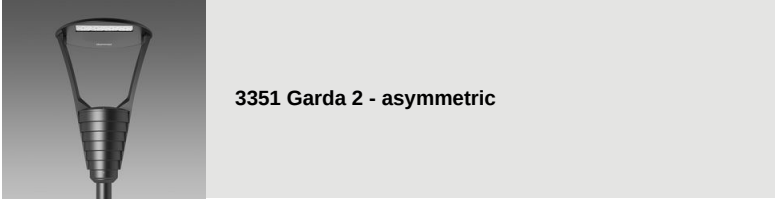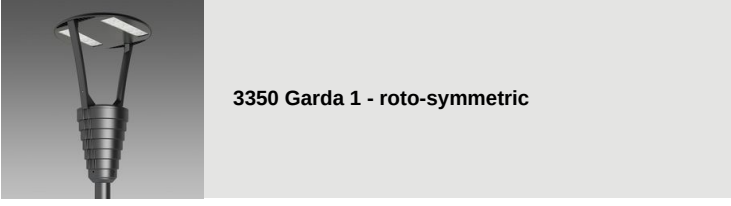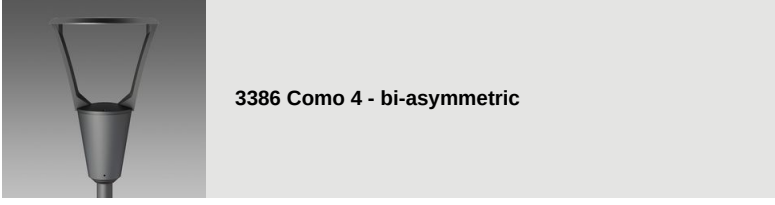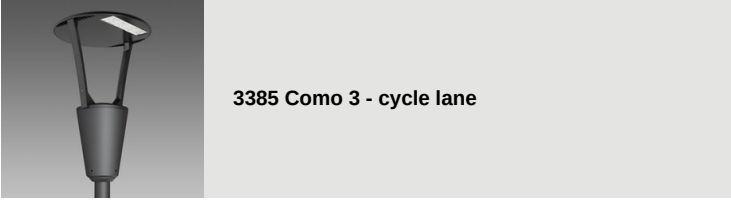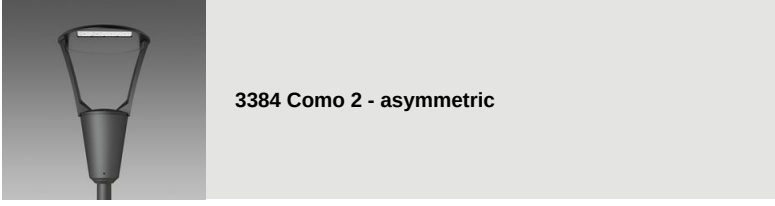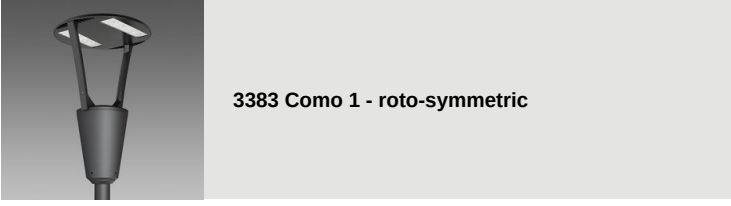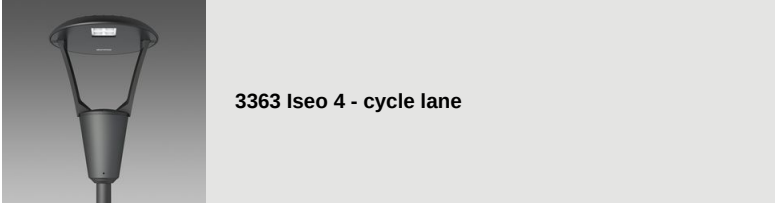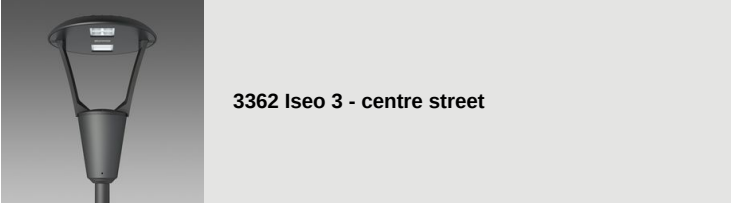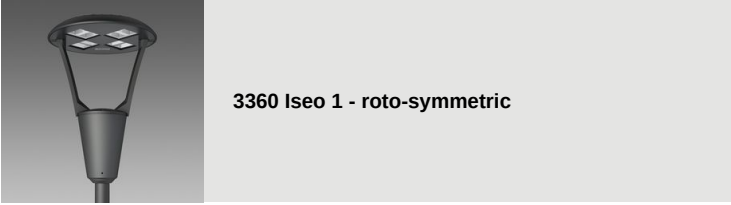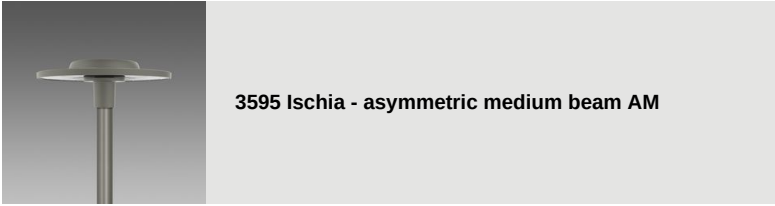


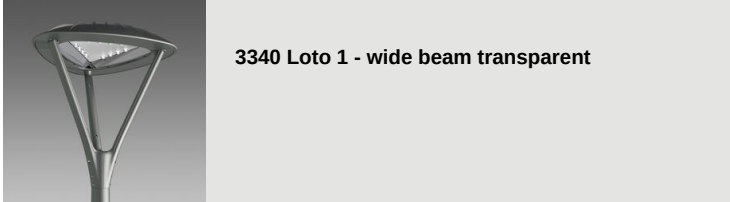

**3340 Loto 1 - wide beam transparent**

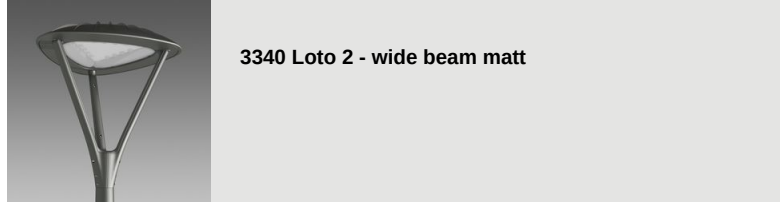


**3340 Loto 2 - wide beam matt**

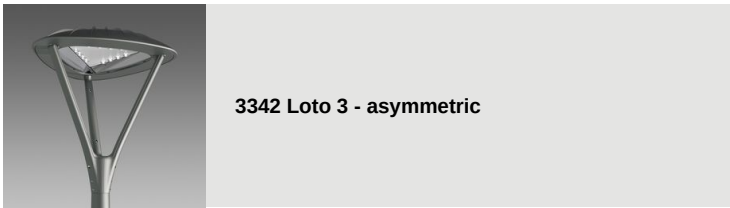


**3342 Loto 3 - asymmetric**




**3343 Loto 4 - cycle lane**

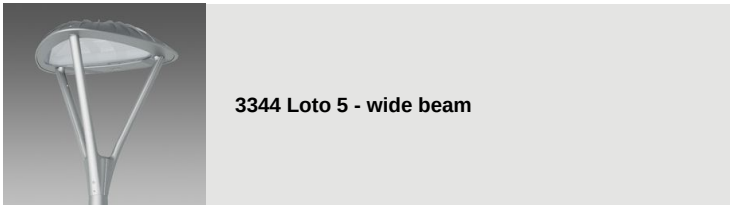


**3344 Loto 5 - wide beam**

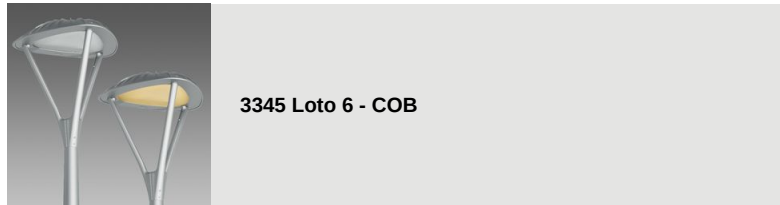


**3345 Loto 6 - COB**

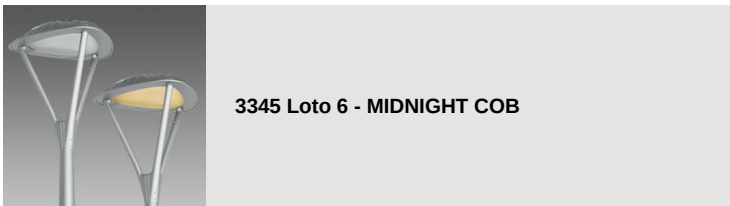

**3345 Loto 6 - MIDNIGHT COB**

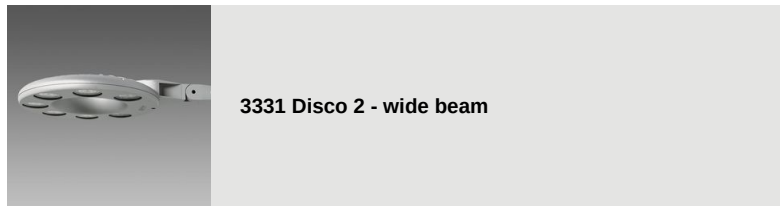


**3331 Disco 2 - wide beam**

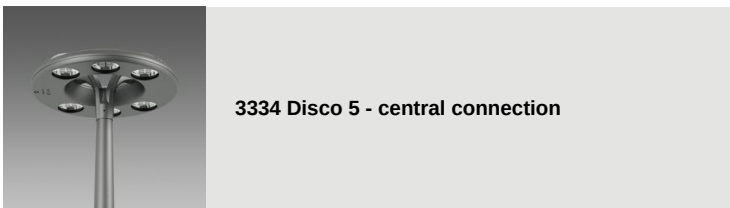

**3334 Disco 5 - central connection**



**3336 Visconti 2.0 - roto-symmetric**

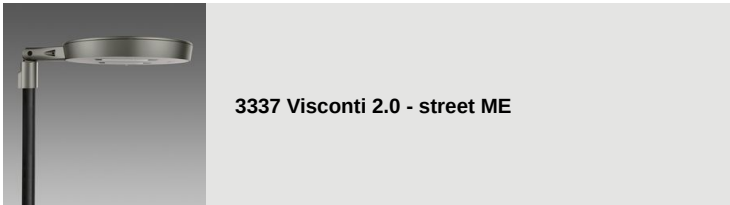

**3337 Visconti 2.0 - street ME**



**3338 Visconti 2.0 - cycle lane**



**3339 Visconti 2.0 - large areas**




**3327 Visconti 2.0 - street ME**




**3328 Visconti 2.0 - street ME**







**3329 Visconti 2.0 - street ME**

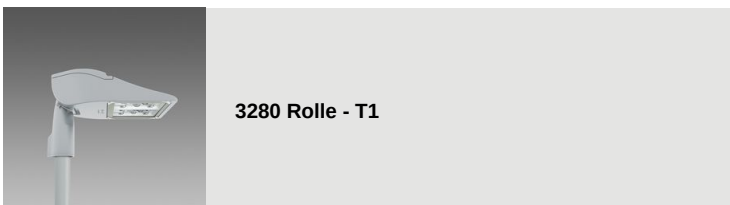

**3280 Rolle - T1**

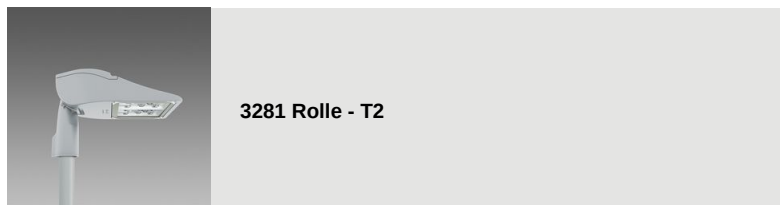

**3281 Rolle - T2**

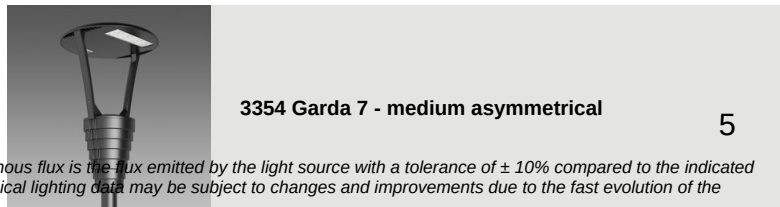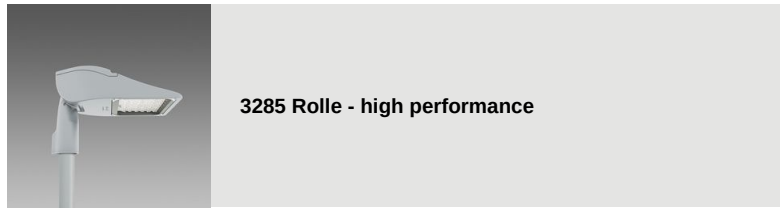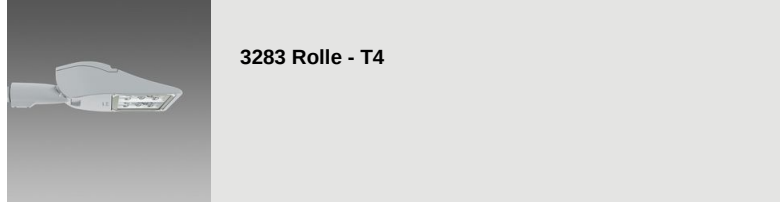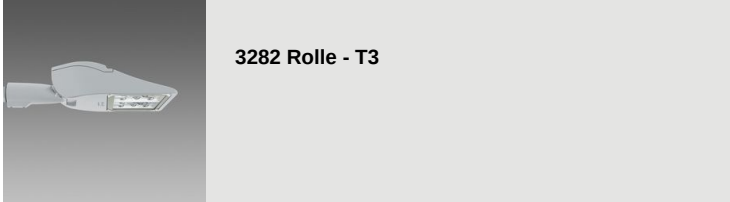

Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Tuesday, October 22, 2024