


## 1409 - Fluted pole ø 100

Code: 426334-00

### GENERAL INFORMATION



|         |                          |
|---------|--------------------------|
| Article | 1409 - Fluted pole ø 100 |
| Code    | 426334-00                |

### DIMENSIONS AND WEIGHT

|             |         |
|-------------|---------|
| Weight (Kg) | 11.3 kg |
|-------------|---------|

### INSTALLATION

|                                     |          |
|-------------------------------------|----------|
| Diameter (Ø) of pole connector (mm) | 60-60 mm |
|-------------------------------------|----------|



1409 Palo rigato ø 100



## 1409 - Fluted pole ø 100


---

Code: 426334-00



## 1409 - Fluted pole $\varnothing$ 100

Code: 426334-00

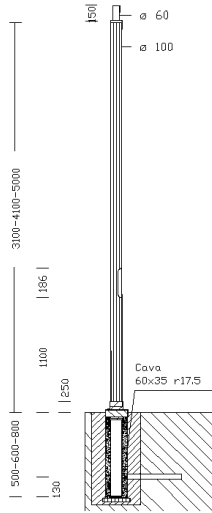

[DOWNLOAD](#)

DESIGNS

[TechnicalDrawing 1409.dxf](#)



### MATERIALS AND COLOURS

|                 |  |
|-----------------|--|
| Housing         | Fluted extruded aluminium, anodised by tin electroplating, 15/20 $\mu$ thick. Aluminium inspection window, with 2 x 16A fuses, 4-pole/3-way terminal block = 10 mm <sup>2</sup> shunt 2.5 mm <sup>2</sup> . Insulation Class II. |
| Pole connection | 0  |
| Coating         | anodised by tin electroplating, 15/20 $\mu$ thick, natural oxidised colour or graphite painted.  |
| Colour          | Oxidised   |

### STANDARDS AND COMPLIANCE







|                    |   |
|--------------------|---|
| Markings and tests | CE  |
| Laboratory Tests   | The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1. |

### WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 0 yr |
|----------------------|------|

## 1409 - Fluted pole ø 100

Code: 426334-00

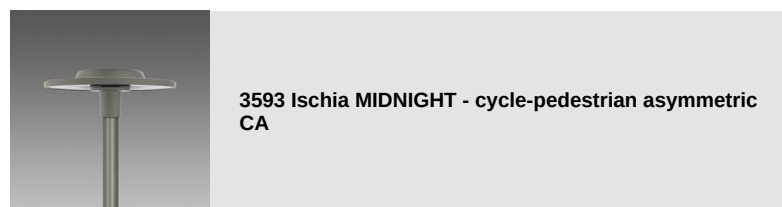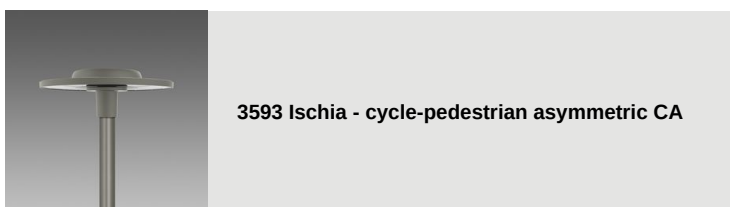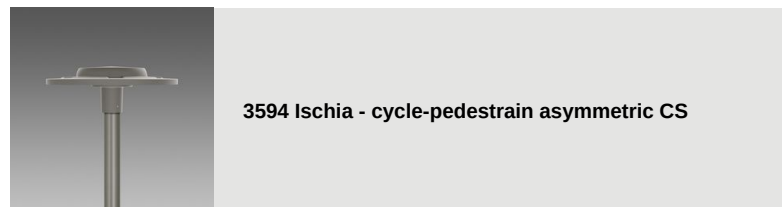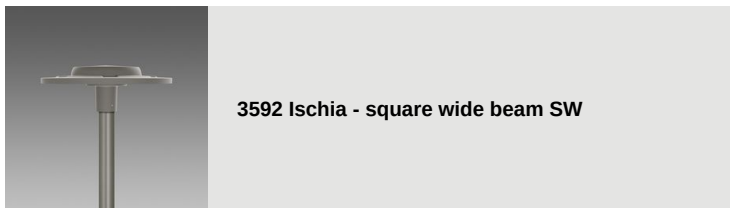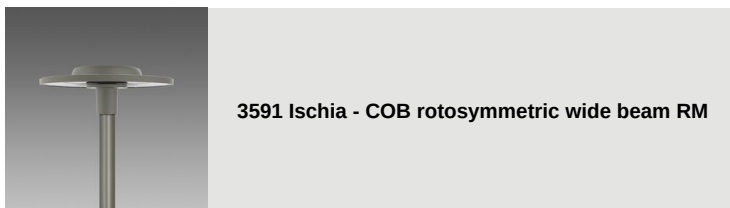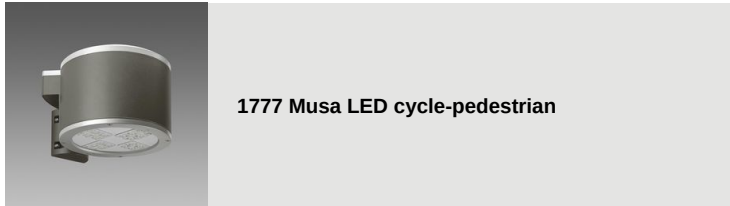

## 1409 - Fluted pole ø 100


Code: 426334-00




3596 Ischia - asymmetric wide beam AW




3595 Ischia - asymmetric medium beam AM




3360 Iseo 1 - roto-symmetric




3361 Iseo 2 - street




3362 Iseo 3 - centre street



3363 Iseo 4 - cycle lane



3383 Como 1 - roto-symmetric



3384 Como 2 - asymmetric



3385 Como 3 - cycle lane



3386 Como 4 - bi-asymmetric



3350 Garda 1 - roto-symmetric



3351 Garda 2 - asymmetric



3352 Garda 3 - cycle lane




3353 Garda 4 - cycle + street




3355 Garda 5 - roto-symmetric




3355 Garda 6 - roto-symmetric

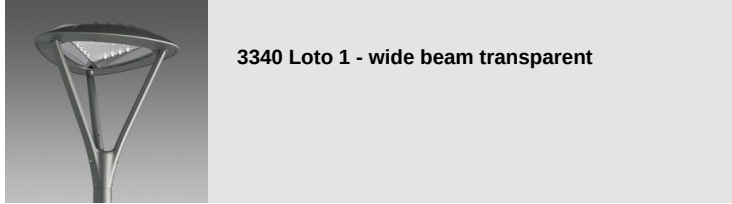

**3340 Loto 1 - wide beam transparent**

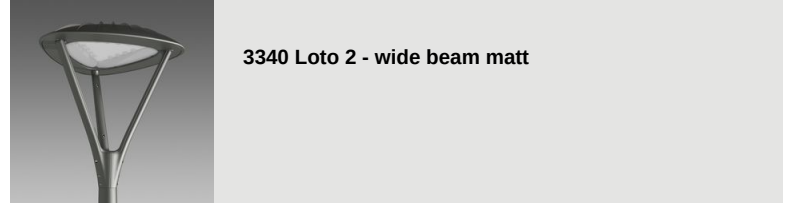


**3340 Loto 2 - wide beam matt**

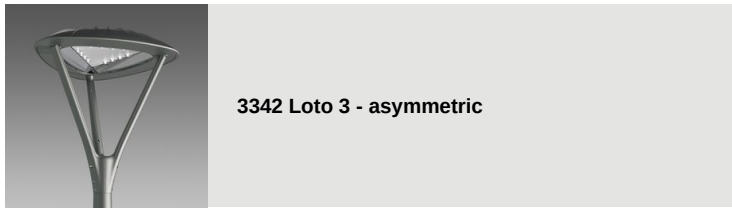


**3342 Loto 3 - asymmetric**




**3343 Loto 4 - cycle lane**

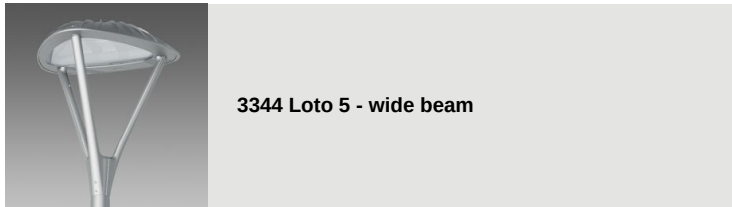

**3344 Loto 5 - wide beam**

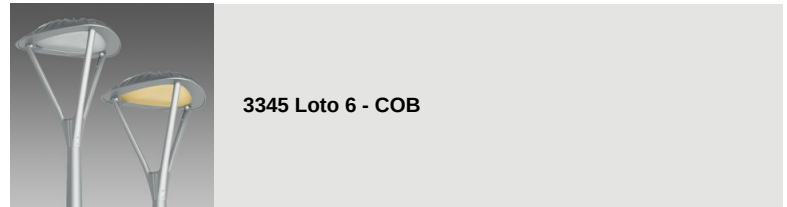


**3345 Loto 6 - COB**

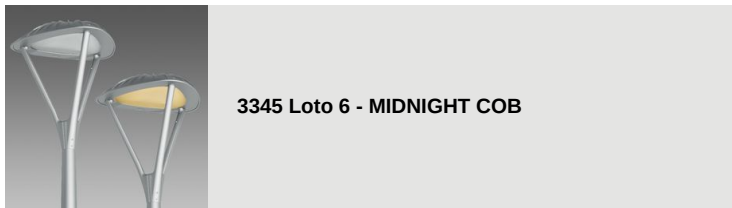

**3345 Loto 6 - MIDNIGHT COB**




**3331 Disco 2 - wide beam**

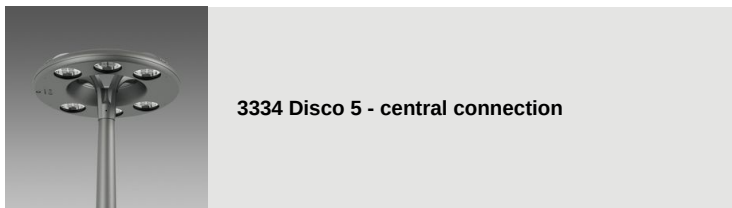

**3334 Disco 5 - central connection**



**3336 Visconti 2.0 - roto-symmetric**

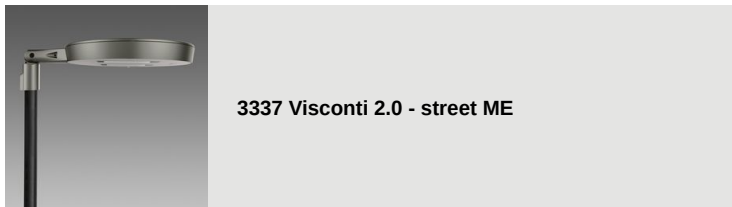

**3337 Visconti 2.0 - street ME**




**3338 Visconti 2.0 - cycle lane**



**3339 Visconti 2.0 - large areas**




**3327 Visconti 2.0 - street ME**

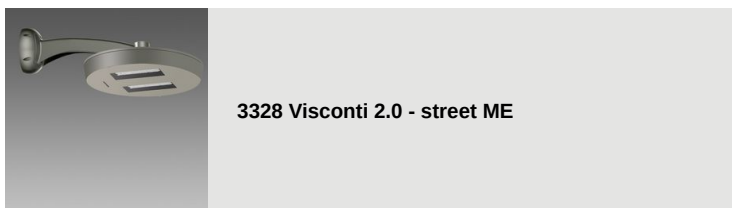


**3328 Visconti 2.0 - street ME**



**3329 Visconti 2.0 - street ME**

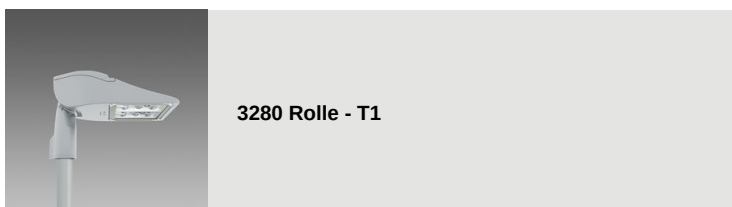

**3280 Rolle - T1**

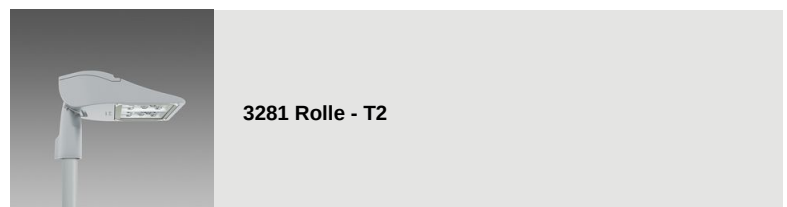

**3281 Rolle - T2**



**3282 Rolle - T3**



**3283 Rolle - T4**



**3284 Rolle - T5**



**3285 Rolle - high performance**



**3286 Rolle - high performance**



**1513 Torcia LED COB**



**1707 Torcia LED**



**1708 Torcia LED**



**1205 Polar**



**1518 Clima LED against light pollution**



**1570 Clima - LED**

Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Wednesday, February 21, 2024