


1408 - Fluted pole ø 100 with base

Code: 426338-00

GENERAL INFORMATION



Article	1408 - Fluted pole ø 100 with base
Code	426338-00

DIMENSIONS AND WEIGHT

Weight (Kg)	18 kg
-------------	-------

INSTALLATION

Diameter (Ø) of pole connector (mm)	60-60 mm
-------------------------------------	----------



1408 Fluted pole ø 100 with base



1408 - Fluted pole ø 100 with base


Code: 426338-00



1408 - Fluted pole \varnothing 100 with base

Code: 426338-00

MATERIALS AND COLOURS

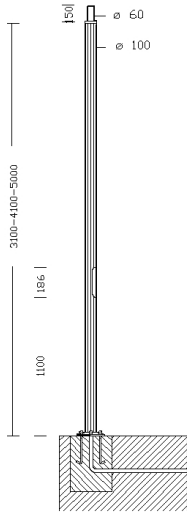

Housing	Fluted extruded aluminium, anodised by tin electroplating, 15/20 μ thick. Aluminium inspection window, with 2 x 16A fuses, 4-pole/3-way terminal block = 10 mm ² shunt 2.5 mm ² . Insulation Class II. Requires the purchase of 4 anchor bolts.
Pole connection	60mm
Coating	anodised by tin electroplating, 15/20 μ thick, natural oxidised colour or graphite painted.
Colour	Oxidised

STANDARDS AND COMPLIANCE

Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

WARRANTY

After sales warranty	0 yr
----------------------	------

DOWNLOAD

MOUNTS

[AssemblyInstructions 1408-1409.pdf](#)







DESIGNS

[TechnicalDrawing 1408.dxf](#)



1408 - Fluted pole ø 100 with base

Code: 426338-00

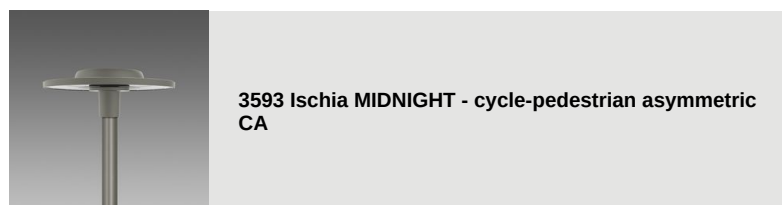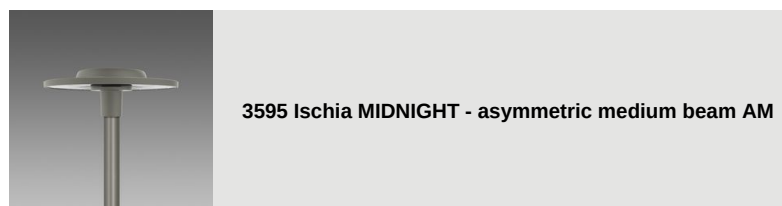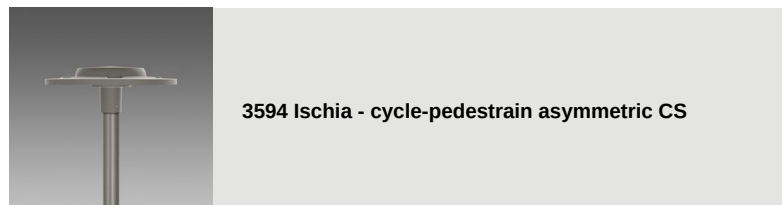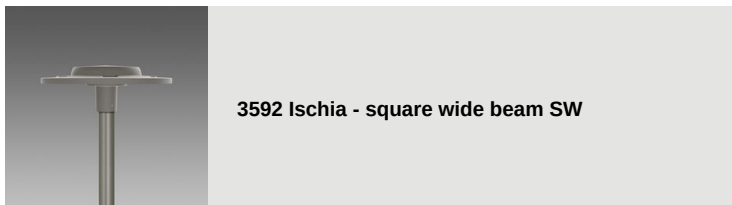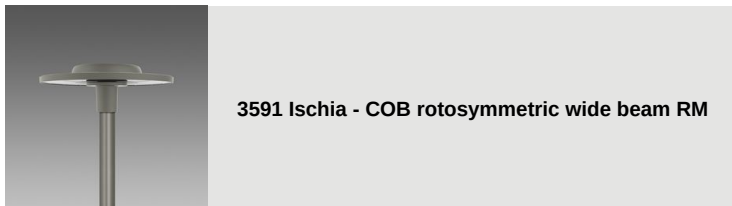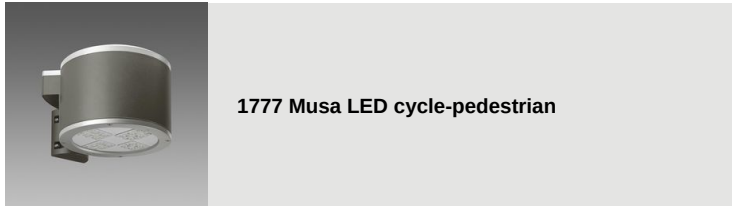

1408 - Fluted pole \varnothing 100 with base


Code: 426338-00




3596 Ischia - asymmetric wide beam AW




3595 Ischia - asymmetric medium beam AM




3360 Iseo 1 - roto-symmetric




3361 Iseo 2 - street




3362 Iseo 3 - centre street



3363 Iseo 4 - cycle lane



3383 Como 1 - roto-symmetric



3384 Como 2 - asymmetric



3385 Como 3 - cycle lane



3386 Como 4 - bi-asymmetric



3350 Garda 1 - roto-symmetric



3351 Garda 2 - asymmetric



3352 Garda 3 - cycle lane




3353 Garda 4 - cycle + street




3355 Garda 5 - roto-symmetric




3355 Garda 6 - roto-symmetric

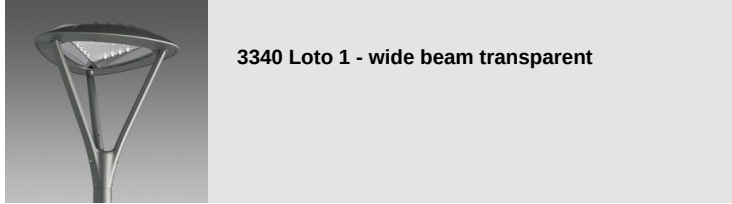

3340 Loto 1 - wide beam transparent

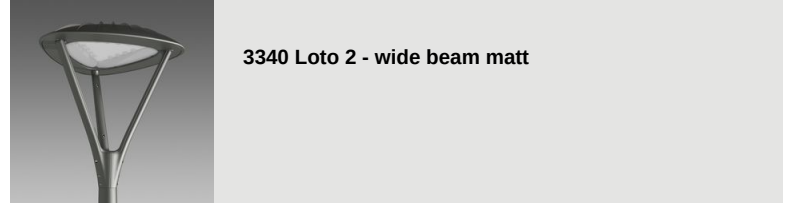


3340 Loto 2 - wide beam matt

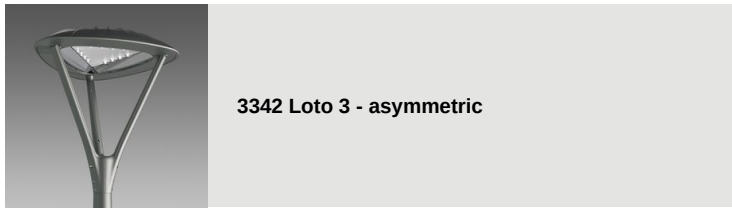


3342 Loto 3 - asymmetric




3343 Loto 4 - cycle lane

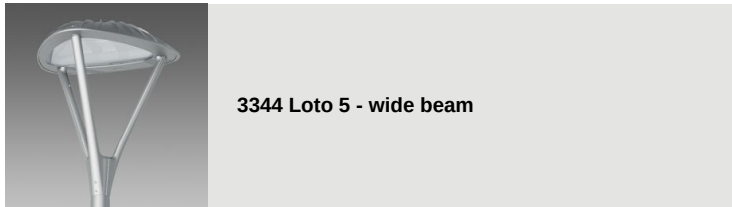

3344 Loto 5 - wide beam

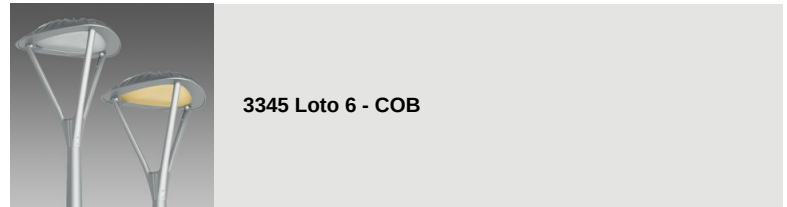


3345 Loto 6 - COB

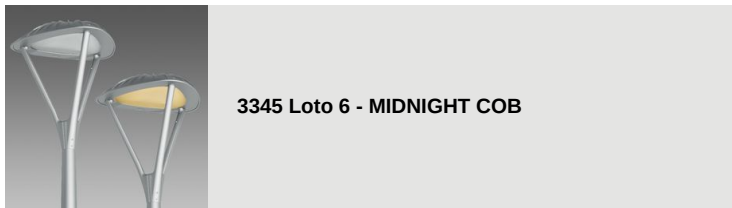

3345 Loto 6 - MIDNIGHT COB




3331 Disco 2 - wide beam

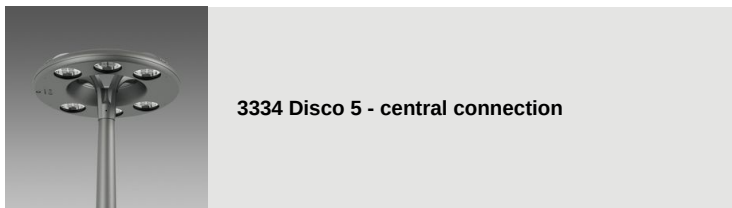

3334 Disco 5 - central connection



3336 Visconti 2.0 - roto-symmetric

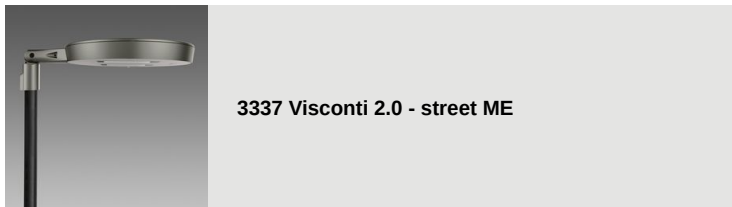

3337 Visconti 2.0 - street ME




3338 Visconti 2.0 - cycle lane



3339 Visconti 2.0 - large areas




3327 Visconti 2.0 - street ME

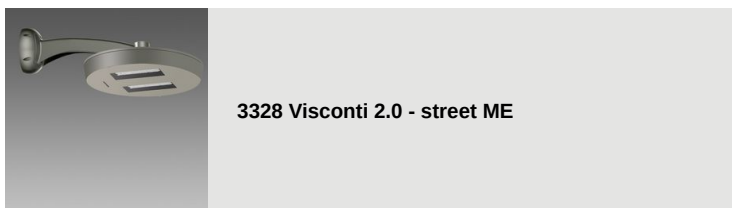


3328 Visconti 2.0 - street ME



3329 Visconti 2.0 - street ME

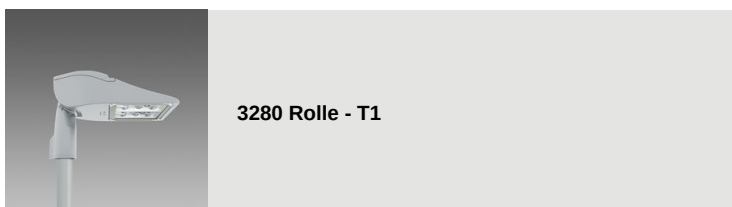

3280 Rolle - T1

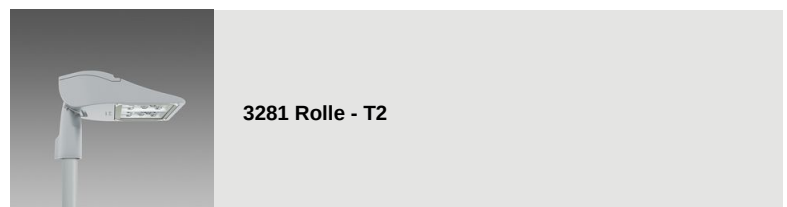

3281 Rolle - T2



3282 Rolle - T3



3283 Rolle - T4



3284 Rolle - T5



3285 Rolle - high performance



3286 Rolle - high performance



1513 Torcia LED COB



1707 Torcia LED



1708 Torcia LED



1205 Polar



1518 Clima LED against light pollution



1570 Clima - LED



3354 Garda 7 - medium asymmetrical

Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Wednesday, December 25, 2024