


## 1508 - Fluted pole ø 120 with base

Code: 426363-00

### GENERAL INFORMATION



|         |                                    |
|---------|------------------------------------|
| Article | 1508 - Fluted pole ø 120 with base |
| Code    | 426363-00                          |

### DIMENSIONS AND WEIGHT

|             |         |
|-------------|---------|
| Weight (Kg) | 25.8 kg |
|-------------|---------|



1508 Palo rigato ø 120 con base



## 1508 - Fluted pole ø 120 with base


---

Code: 426363-00



## 1508 - Fluted pole ø 120 with base

Code: 426363-00

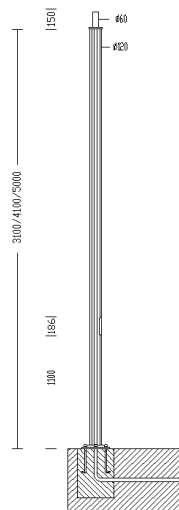

### DOWNLOAD

MOUNTS

[AssemblyInstructions finestra.dxf](#)

DESIGNS

[TechnicalDrawing 1508.dxf](#)



### MATERIALS AND COLOURS

|                 |  |
|-----------------|--|
| Housing         | Fluted extruded aluminium, anodised by tin electroplating, 15/20µ thick. Aluminium inspection window, with 2 x 16A fuses, 4-pole/3-way terminal block = 10 mm <sup>2</sup> shunt 2.5 mm <sup>2</sup> . Insulation Class II. Requires the purchase of 4 anchor bolts. |
| Pole connection | 0  |
| Coating         | anodised by tin electroplating, 15/20µ thick, natural oxidised colour or graphite painted.   |
| Colour          | Graphite   |

### STANDARDS AND COMPLIANCE





|                    |   |
|--------------------|---|
| Markings and tests | CE  |
| Laboratory Tests   | The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1. |

### WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 0 yr |
|----------------------|------|


## 1508 - Fluted pole ø 120 with base

Code: 426363-00

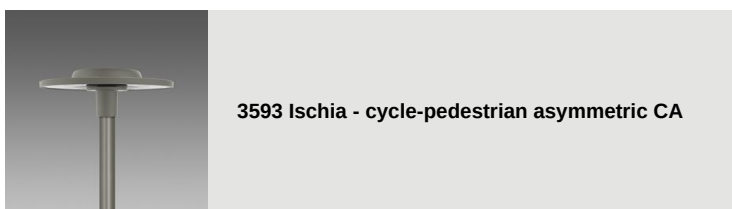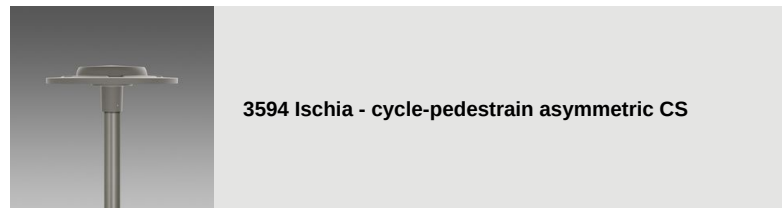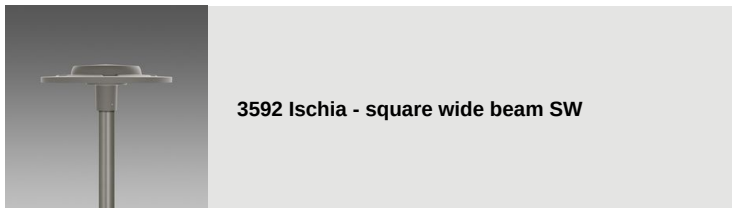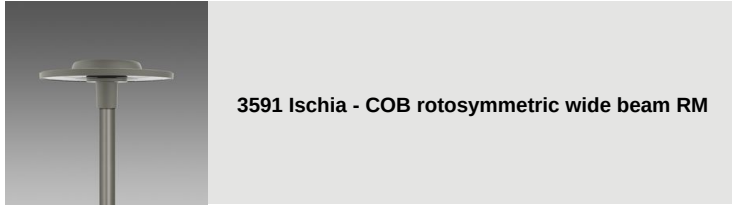


## 1508 - Fluted pole ø 120 with base


Code: 426363-00




**3360 Iseo 1 - roto-symmetric**




**3361 Iseo 2 - street**




**3362 Iseo 3 - centre street**




**3363 Iseo 4 - cycle lane**



**3383 Como 1 - roto-symmetric**



**3384 Como 2 - asymmetric**



**3385 Como 3 - cycle lane**



**3386 Como 4 - bi-asymmetric**



**3350 Garda 1 - roto-symmetric**



**3351 Garda 2 - asymmetric**



**3352 Garda 3 - cycle lane**



**3353 Garda 4 - cycle + street**



**3355 Garda 5 - roto-symmetric**




**3355 Garda 6 - roto-symmetric**




**3340 Loto 1 - wide beam transparent**




**3340 Loto 2 - wide beam matt**

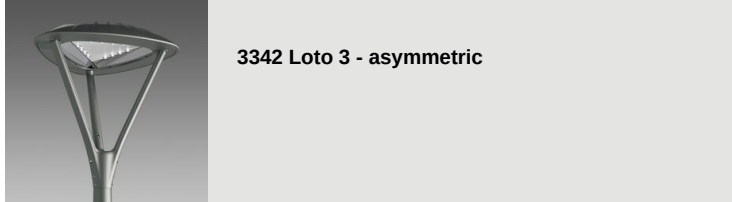


**3342 Loto 3 - asymmetric**

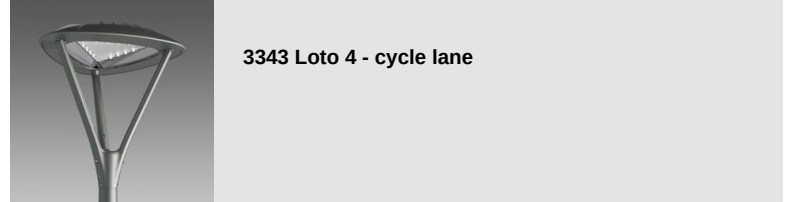


**3343 Loto 4 - cycle lane**

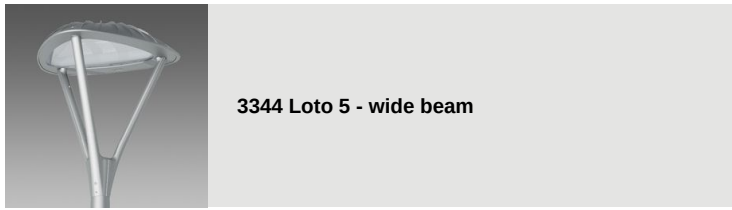


**3344 Loto 5 - wide beam**

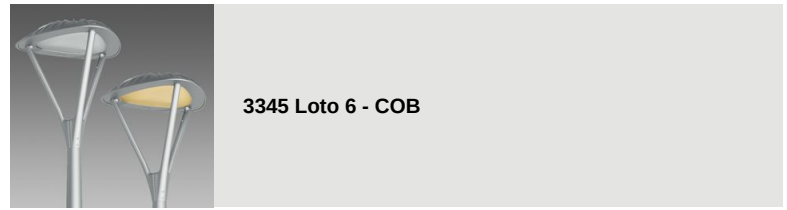


**3345 Loto 6 - COB**

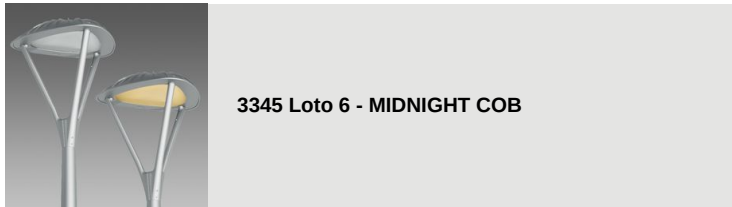

**3345 Loto 6 - MIDNIGHT COB**

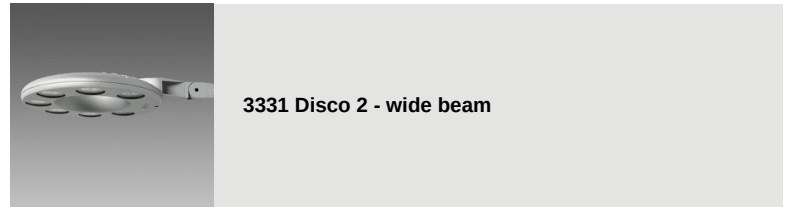

**3331 Disco 2 - wide beam**

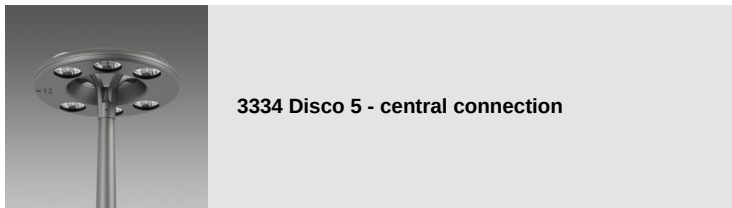


**3334 Disco 5 - central connection**



**3336 Visconti 2.0 - roto-symmetric**



**3337 Visconti 2.0 - street ME**

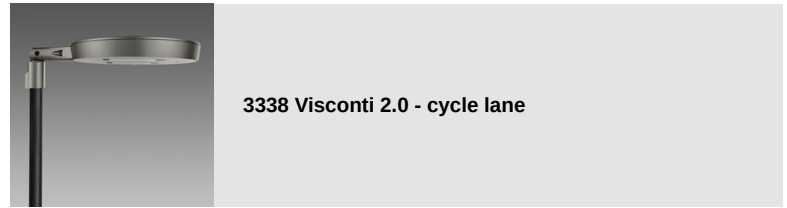

**3338 Visconti 2.0 - cycle lane**



**3339 Visconti 2.0 - large areas**



**3327 Visconti 2.0 - street ME**



**3328 Visconti 2.0 - street ME**



**3329 Visconti 2.0 - street ME**



**3290 Sella 1 - ST**



**3291 Sella 1 - STWB**



**3292 Sella 1 - asymmetric 45°**



**3293 Sella 1 - asymmetric 60°**



**3294 Sella 1 - cycle lanes**



**3295 Sella 1 - large areas**



**3296 Sella 1 - HP**



**3297 Sella 1 - HP -pedestrian crossings LH**



**3298 Sella 1 - HP -pedestrian crossings RH**



**3390 Sella 2 - ST**



**3391 Sella 2 - STWB**



**3392 Sella 2 - asymmetric 45°**



**3393 Sella 2 - asymmetric 60°**



**3395 Sella 2 - large areas**



**3396 Sella 2 - HP**



**3475 Mini Giovi W1 - street**



**3476 Mini Giovi W2 - street**



**3477 Mini Giovi N1 - cycle lane**



**3478 Mini Giovi M1 - street**




**3479 Mini Giovi T4 - large areas**



**3480 Mini Giovi - high performance - large areas**



**3481 Mini Giovi - high performance - street ME**



3482 Mini Giovi - high performance - cycle lane




3483 Mini Giovi AMBRA - large areas




3484 Mini Giovi AMBRA - street ME




3485 Mini Giovi AMBER - cycle lane




3486 Mini Giovi left (LH)- pedestrian crossings




3487 Mini Giovi right (RH) - pedestrian crossings




3472 Giovi M1 - street




3473 Giovi W1 - street




3474 Giovi M2 - street



3490 Giovi - high performance - large areas




3491 Giovi - high performance - street ME




3492 Giovi AMBRA T4 - large areas




3493 Giovi AMBER - street ME




3494 Giovi T4 - asymmetric - large areas



3495 Giovi W2 - street



3496 Giovi - left (LH) - pedestrian crossings



3497 Giovi - right (RH) - pedestrian crossings



3269 Mini Stelvio FX T5 - wide beam





3277 Mini Stelvio FX T2 - street



3278 Mini Stelvio FX T3 - wide beam street



3279 Mini Stelvio FX T4 - asymmetric



3375 Mini Stelvio - high performance - street



3376 Mini Stelvio - high performance - large areas



3270 Stelvio 1 - Plus - LED



3274 Stelvio 2 - Plus - LED asymmetric



3370 Stelvio - high performance - street



3374 Stelvio - high performance - large areas



3280 Rolle - T1



3283 Rolle - T4



3284 Rolle - T5



3285 Rolle - high performance



3286 Rolle - high performance



**design illuminazione**

1518 Clima LED against light pollution



1570 Clima - LED

Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Saturday, March 2, 2024