

1508 - Fluted pole ø 120 with base

Code: 426364-00



Fluted aluminium pole with an elegant and functional design, ideal for lighting applications in residential and urban environments. The grooved finish enhances its appearance and ensures long-lasting durability. Available with base plate for surface installation or for in-ground mounting for a stable and discreet fixing.



GENERAL INFORMATION

Article	1508 - Fluted pole ø 120 with base
Code	426364-00

DIMENSIONS AND WEIGHT

Weight (Kg)	30 kg
-------------	-------

INSTALLATION

Diameter (Ø) of pole connector (mm)	60-60 mm
-------------------------------------	----------


1508 - Fluted pole ø 120 with base

Code: 426364-00



1508 - Fluted pole ø 120 with base

Code: 426364-00

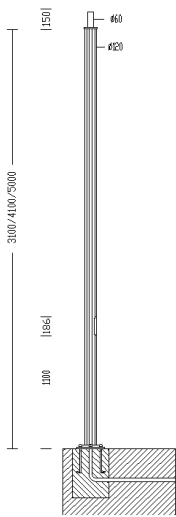

DOWNLOAD

MOUNTS

AssemblyInstructions 1508-1509.pdf

AssemblyInstructions DOP - 1508-2025-07.pdf

DESIGNS

TechnicalDrawing 1508.dxf



MATERIALS AND COLOURS

Housing	Fluted extruded aluminium, anodised by tin electroplating, 15/20µ thick. Aluminium inspection window, with 2 x 16A fuses, 4-pole/3-way terminal block = 10 mm2 shunt 2.5 mm2. Insulation Class II. Requires the purchase of 4 anchor bolts.
Pole connection	60-60
Coating	anodised by tin electroplating, 15/20µ thick, natural oxidised colour or graphite painted.
Colour	Graphite

STANDARDS AND COMPLIANCE

Markings and tests	CE
Laboratory Tests	The possibility of coupling a composition to the lamp post is subject to verification of the resistance to wind load, in the areas specified in Standard DM 14/01/2008 and according to the design load specifications in Standard EN 40-3-1.

WARRANTY

After sales warranty	0 yr
----------------------	------