


1544 - Globo LED

Code: 427246-00



Globo LED is a versatile lighting fixture suitable for wall or ceiling installation, ideal for indoor and outdoor environments. Its timeless spherical shape provides soft, uniform light distribution, creating a welcoming and functional atmosphere. Suitable for residential and professional settings, Globo LED combines aesthetic simplicity, lighting efficiency and easy integration into any space.

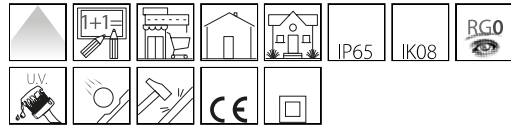

GENERAL INFORMATION

Article	1544 - Globo LED
Code	427246-00

DIMENSIONS AND WEIGHT

Height (mm)	124 mm
Diameter (Ø) (mm)	300 mm
Weight (Kg)	0.8 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Frequency (Hz)	50 Hz
Wiring name	CLD-S
Power factor	≥0.9
Insulation class	Class II
Controllability	None

1544 - Globo LED

Code: 427246-00

PHOTOMETRIC DATA

Lighting source	LED
CCT	0 K
LED flux maintenance	50000 hr, L 80, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65




1544 - Globo LED

Code: 427246-00

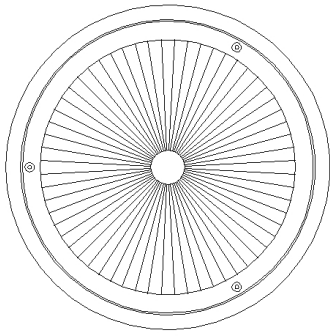

300



124

DOWNLOAD

MOUNTS

[AssemblyInstructions 1544 04-23.pdf](#)

DESIGNS

[TechnicalDrawing 1544glb.dxf](#)



MATERIALS AND COLOURS

Housing	in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing.
Diffuser	in anti-glare polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, externally smooth and dustproof.
Colour	Grey
Equipment	gasket in eco-friendly material. Rubber cable gland with diam. 1/2 gas inch (cable min. diam.9 max diam. 12).

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

WARRANTY

After sales warranty	3 yr
----------------------	------