

1847 - Orma LED

Code: 427542-07



1847 Orma LED



GENERAL INFORMATION

Article	1847 - Orma LED
Code	427542-07

DIMENSIONS AND WEIGHT

Length (mm)	320 mm
Width (mm)	168 mm
Height (mm)	115 mm
Weight (Kg)	1.5 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-E
Power factor	≥0.85
Insulation class	Class I
Controllability	None

1847 - Orma LED

Code: 427542-07



PHOTOMETRIC DATA

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	954 lm
Power absorption (total) (W)	9 W
CCT	4000 K
LED flux maintenance	50000 hr, L 90, B 10



MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65

1847 - Orma LED

Code: 427542-07

MATERIALS AND COLOURS

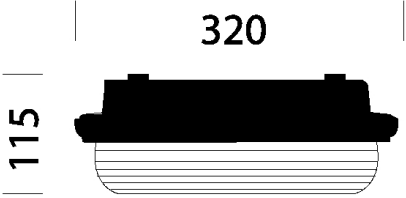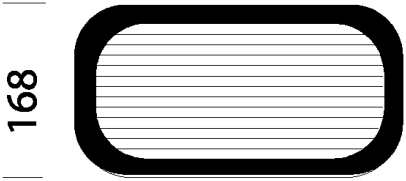

DOWNLOAD

MOUNTS
AssemblyInstructions cubo-orma 09-22.pdf

DESIGNS
TechnicalDrawing 1847.dxf



Housing	in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing.
Diffuser	in anti-glare matt polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing, externally smooth and dustproof.
Colour	Grey
Equipment	gasket in eco-friendly material. Rubber cable gland with diam. 1/2 gas inch (cable min. diam.9 max diam. 12).

EMERGENCY LIGHTING

Emergency power supply type	Luminaire with battery
Type of emergency	S.A.
Emergency operation time	1h

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

WARRANTY

After sales warranty	3 yr
----------------------	------