


## 1208 - Box

Code: 431601-00

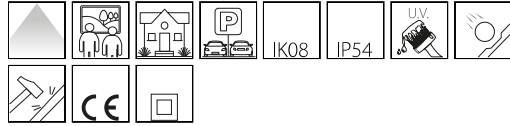

BOX is a family of wall-mounted LED luminaires featuring an essential, contemporary design, created for functional and discreet lighting of pedestrian walkways, outdoor corridors, and connecting paths.

The well-controlled light distribution ensures visual comfort and safety, preventing glare and light dispersion. Its compact and robust construction makes BOX suitable for both residential and architectural applications, blending seamlessly and understatedly into any environment.



### GENERAL INFORMATION

Article	1208 - Box
Code	431601-00

### DIMENSIONS AND WEIGHT

Length (mm)	223 mm
Width (mm)	100 mm
Height (mm)	89 mm
Weight (Kg)	0.8 kg

### INSTALLATION

Recessed dimensions - Length (mm)	110 mm
Recessed dimensions - Width (mm)	215 mm

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Voltage (V)	0 V
Frequency (Hz)	0 Hz
Wiring name	CLD-S
Wiring	power supply 220-240V 50/60Hz. Rigid cable with 0.50 mm <sup>2</sup> cross-section. 2P terminal block with max. 2.5 mm <sup>2</sup> cross-section cables.
Power factor	>0
Insulation class	Class I
Controllability	None

## 1208 - Box

Code: 431601-00

### PHOTOMETRIC DATA

Lighting source	LED
CCT	0 K
LED flux maintenance	0 hr, L 0, B 0

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	54




## 1208 - Box

Code: 431601-00

### MATERIALS AND COLOURS



223



114

100

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions box 07-20.pdf](#)

#### DESIGNS

[TechnicalDrawing 1208box.dxf](#)



Housing	in fibreglass nylon, shatterproof, UV stabilised. Complete with linear horizontal grid, frame in die-cast aluminium.
Diffuser	in opal plexiglass.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Graphite
Equipment	silicone and EPDM rubber sealing gasket.

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	F

### WARRANTY

After sales warranty	3 yr
----------------------	------