

1213 - Pocket small

Code: 431611-00



Pocket, the multi-format LED step light, is the perfect solution for illuminating pathways, stairs, driveways, and corridors, both indoors and outdoors. Thanks to its availability in various shapes and sizes, it perfectly adapts to any design and functional requirement.



GENERAL INFORMATION

Article	1213 - Pocket small
Code	431611-00

DIMENSIONS AND WEIGHT

Length (mm)	120 mm
Width (mm)	36 mm
Height (mm)	120 mm
Weight (Kg)	0.6 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class I
Controllability	None

1213 - Pocket small

Code: 431611-00

PHOTOMETRIC DATA

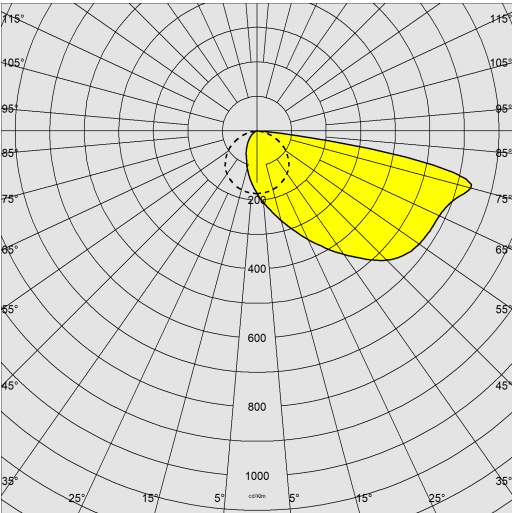

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	430 lm
Power absorption (total) (W)	6 W
CCT	4000 K
Luminous efficacy (lm/W)	72 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK10
IP	66



1213 - Pocket small

Code: 431611-00

MATERIALS AND COLOURS

Housing	in die-cast aluminium.
Diffuser	matt polycarbonate diffuser
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Graphite

EMERGENCY LIGHTING


Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

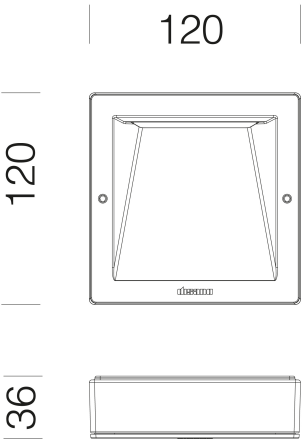

DOWNLOAD

MOUNTS

AssemblyInstructions pocket 07-23.pdf


DESIGNS

TechnicalDrawing 1213.dxf



1213 - Pocket small

Code: 431611-00



308 Wall frame