

1216 - Pocket 3

Code: 431617-00



Pocket LED is a residential step light designed for both indoor and outdoor use. Available in round and square designs, these lights effortlessly combine high aesthetic appeal with exceptional functionality and are offered in both recessed and wall-mounted versions. They also deliver excellent lighting performance, thanks to advanced LED sources and premium-quality materials that ensure durability and a long service life. With their minimalist design, these technologically advanced step lights not only illuminate evening pathways but also serve as elegant decorative elements, enhancing every access point and transit route.



GENERAL INFORMATION

Article	1216 - Pocket 3
Code	431617-00

DIMENSIONS AND WEIGHT

Length (mm)	180 mm
Width (mm)	40 mm
Height (mm)	180 mm
Weight (Kg)	0.8 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class I
Controllability	None

1216 - Pocket 3

Code: 431617-00

PHOTOMETRIC DATA

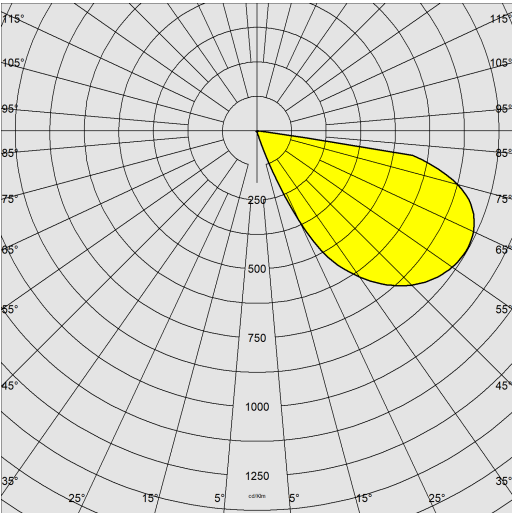

Lighting source	LED SMD
CRI	>80
Luminous flux (output) (lm)	320 lm
Power absorption (total) (W)	8 W
CCT	3000 K
Luminous efficacy (lm/W)	40 lm/W
LED flux maintenance	50000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



1216 - Pocket 3

Code: 431617-00

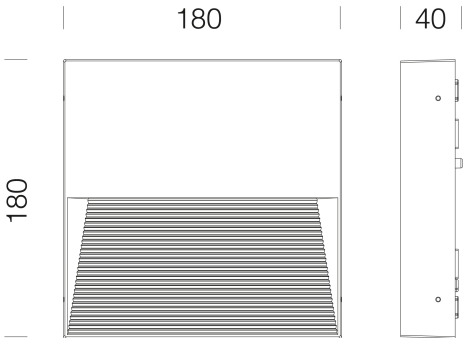

DOWNLOAD

- MOUNTS
- AssemblyInstructions Pocket parete 12-24.pdf
- DESIGNS
- TechnicalDrawing 1216.dxf



MATERIALS AND COLOURS

Housing	in die-cast aluminium.
Diffuser	tempered glass, resistant to thermal shock and impact
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Anthracite

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

WARRANTY

After sales warranty	3 yr
----------------------	------