


1531 - Faro 2 LED - tall

Code: 510060-00

GENERAL INFORMATION

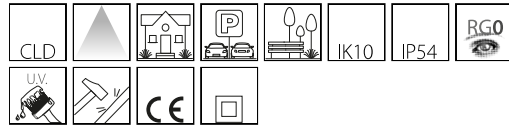

| | |
|---------|--------------------------|
| Article | 1531 - Faro 2 LED - tall |
| Code | 510060-00 |

DIMENSIONS AND WEIGHT

| | |
|-------------------|--------|
| Height (mm) | 900 mm |
| Diameter (Ø) (mm) | 100 mm |
| Weight (Kg) | 3 kg |

ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|--------------------|----------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD |
| Power factor | ≥0.9 |
| Insulation class | Class II |
| Controllability | None |




In addition to functional aspects, outdoor lighting must also take into account aesthetics. Disano has therefore expanded the Faro series to include a LED version. It is a small-size luminaire with the right light beam management can create pleasant and elegant settings. This luminaire was designed for installation on a steel column and as a wall lamp.



1531 - Faro 2 LED - tall

Code: 510060-00

PHOTOMETRIC DATA

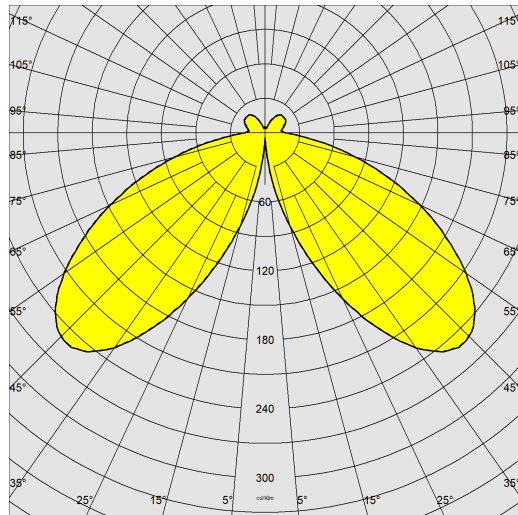

| | |
|------------------------------|----------------------|
| Lighting source | LED |
| CRI | 80 |
| Luminous flux (output) (lm) | 424 lm |
| Power absorption (total) (W) | 8 W |
| CCT | 4000 K |
| Luminous efficacy (lm/W) | 53 lm/W |
| LED flux maintenance | 50000 hr, L 80, B 20 |


MECHANICAL CHARACTERISTICS

| | |
|-------------------------------|------|
| Impact resistance rating (IK) | IK10 |
| IP | 54 |



1531 - Faro 2 LED - tall

Code: 510060-00

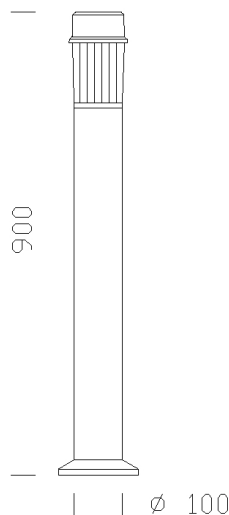

DOWNLOAD

MOUNTS

[AssemblyInstructions faro2 02-23.pdf](#)

DESIGNS

[BIM 1531 Faro 2 LED.zip](#)

[TechnicalDrawing 1531.dxf](#)

[TechnicalDrawing3D disano 1531 faro 2.3ds](#)



MATERIALS AND COLOURS

| | |
|--------------------------------|---|
| Housing | in extruded aluminium, cylindrical cross-section with a diam. of 100 mm, die-cast cover. |
| Diffuser | in polycarbonate, transparent, grooved on the inside and smooth on the outside, dustproof. |
| Ground connection (base) | in fibreglass nylon, shatterproof. |
| Coating | pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised. |
| Special coating (UPON REQUEST) | upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front). |
| Colour | Graphite |
| Equipment | - with air circulation valve. - complete with waterproof connector for line connection. |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 |
| Markings and tests | CE |
| Reference standards | EN60598-1. With degree of protection according to EN60529. |
| Energy Label | F |

WARRANTY

| | |
|----------------------|------|
| After sales warranty | 3 yr |
|----------------------|------|