

## 1535 - Faro 2 LED - wall

Code: 510460-00

### GENERAL INFORMATION



Article	1535 - Faro 2 LED - wall
Code	510460-00

### DIMENSIONS AND WEIGHT

Length (mm)	180 mm
Width (mm)	100 mm
Height (mm)	300 mm
Weight (Kg)	1.2 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class II
Controllability	None




In addition to functional aspects, outdoor lighting must also take into account aesthetics. Disano has therefore expanded the Faro series to include a LED version. It is a small-size luminaire with the right light beam management can create pleasant and elegant settings. This luminaire was designed for installation on a steel column and as a wall lamp.



## 1535 - Faro 2 LED - wall

Code: 510460-00

### PHOTOMETRIC DATA

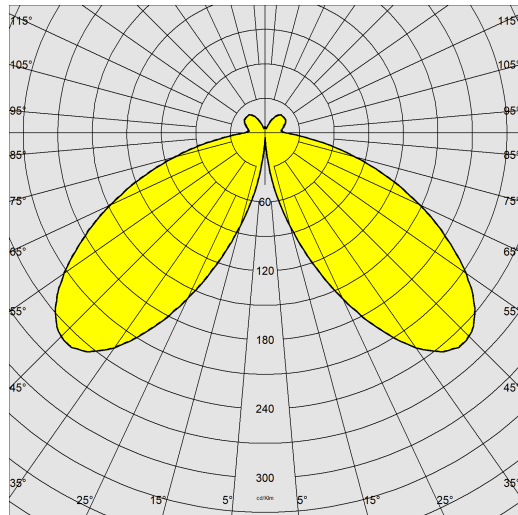

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	424 lm
Power absorption (total) (W)	8 W
CCT	4000 K
Luminous efficacy (lm/W)	53 lm/W
LED flux maintenance	50000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK10
IP	54



# 1535 - Faro 2 LED - wall

Code: 510460-00

## MATERIALS AND COLOURS

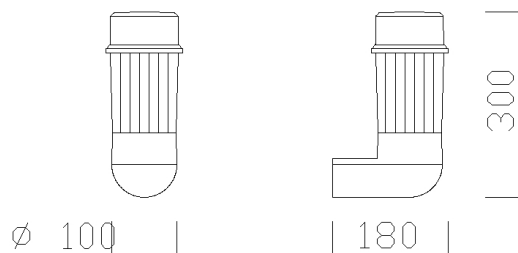

Housing	in extruded aluminium, cylindrical cross-section with a diam. of 100 mm, die-cast cover.
Diffuser	in polycarbonate, transparent, grooved on the inside and smooth on the outside, dustproof.
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	Graphite
Equipment	<ul style="list-style-type: none"> <li>- with air circulation valve.</li> <li>- complete with waterproof connector for line connection.</li> <li>- wall mounting plate.</li> </ul>

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

## DOWNLOAD

### MOUNTS

[AssemblyInstructions faro2 02-23.pdf](#)

### DESIGNS

[BIM 1535 Faro 2 LED - wall version.zip](#)

[TechnicalDrawing 1534i.dxf](#)

[TechnicalDrawing3D disano 1535 faro 2.3ds](#)

## WARRANTY

After sales warranty	3 yr
----------------------	------

