

1734 - Tower - tall

Code: 511136-39



Tower is the perfect solution for illuminating gardens, parks, pedestrian walkways, and areas used for leisure and socialisation. Available in two heights, this product features a sleek, modern design that seamlessly integrates into any outdoor setting. Equipped with the latest LED technology, Tower delivers efficient, uniform illumination, enhancing safety and visibility.

Made from weather-resistant materials, it is built to withstand the elements and ensure long-lasting performance.

With its ease of installation and energy-efficient operation, Tower offers a sustainable and high-quality outdoor lighting solution.



GENERAL INFORMATION

Article	1734 - Tower - tall
Code	511136-39

DIMENSIONS AND WEIGHT

Length (mm)	185 mm
Width (mm)	185 mm
Height (mm)	660 mm
Weight (Kg)	4.3 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class I
Controllability	None

1734 - Tower - tall

Code: 511136-39

PHOTOMETRIC DATA

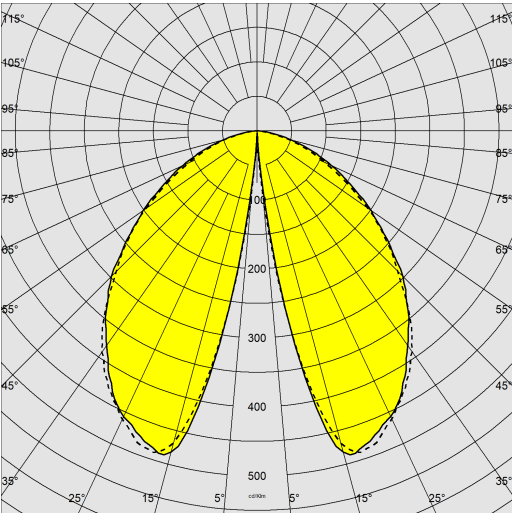

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	2100 lm
Power absorption (total) (W)	20 W
CCT	3000 K
Luminous efficacy (lm/W)	105 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK09
IP	65



1734 - Tower - tall

Code: 511136-39

MATERIALS AND COLOURS

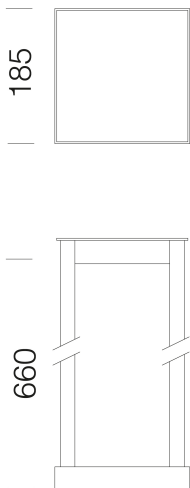

Housing	Steel
Diffuser	tempered glass, resistant to thermal shock and impact
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Graphite
Equipment	complete with waterproof connector for line connection.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS

AssemblyInstructions 1733-1734 12-24.pdf

DESIGNS

BIM 1734 Tower 03-26.zip

TechnicalDrawing 1734g.dxf

