


## 1841 - Bitta 2 LED - wall-mount

Code: 511442-00



Outdoor lighting must serve both a functional and an aesthetic function.  
A small luminaire with the right light beam management can create striking and elegant settings.  
A luminaire designed for both steel column and wall-mounted applications.  
Great versatility and the use of advanced, high-efficiency LED technology.

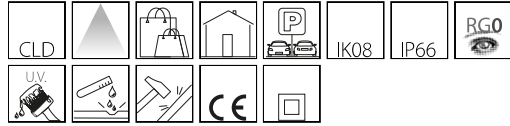

### GENERAL INFORMATION

Article	1841 - Bitta 2 LED - wall-mount
Code	511442-00

### DIMENSIONS AND WEIGHT

Length (mm)	413 mm
Width (mm)	323 mm
Height (mm)	310 mm
Weight (Kg)	2.7 kg


### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

## 1841 - Bitta 2 LED - wall-mount

Code: 511442-00

### PHOTOMETRIC DATA

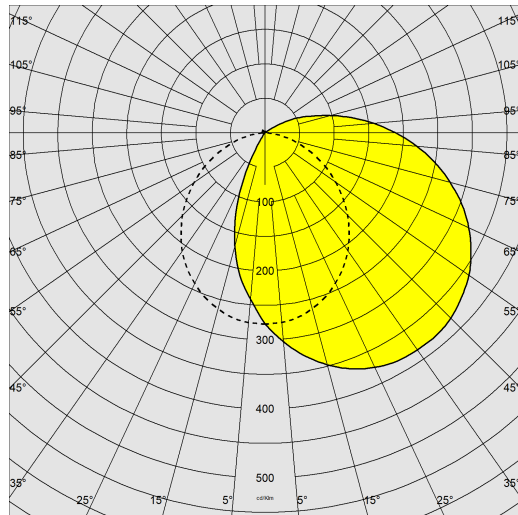

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	549 lm
Power absorption (total) (W)	5 W
CCT	4000 K
Luminous efficacy (lm/W)	50 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	0
LED flux maintenance	50000 hr, L 70, B 50

### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	66



# 1841 - Bitta 2 LED - wall-mount

Code: 511442-00

## MATERIALS AND COLOURS

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions bitta 04-23.pdf](#)

#### DESIGNS

[BIM 1841 Bitta 2.zip](#)

[TechnicalDrawing 1843.dxf](#)

[TechnicalDrawing3D disano 1841 bitta 2 wall.3ds](#)



Housing	in die-cast aluminium.
Diffuser	in polycarbonate, transparent, anti-glare, shatterproof and V2 self-extinguishing, UV stabilised.
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Anthracite
Equipment	- with air circulation valve. - complete with waterproof connector for line connection. - wall mounting plate.

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

## WARRANTY

After sales warranty	3 yr
----------------------	------