

1849 - Bitta 3 - floor

Code: 511445-00



Outdoor lighting must serve both a functional and an aesthetic function.
A small luminaire with the right light beam management can create striking and elegant settings.
A luminaire designed for both steel column and wall-mounted applications.
Great versatility and the use of advanced, high-efficiency LED technology.



GENERAL INFORMATION

Article	1849 - Bitta 3 - floor
Code	511445-00

DIMENSIONS AND WEIGHT

Length (mm)	413 mm
Width (mm)	232 mm
Height (mm)	2400 mm
Weight (Kg)	14.7 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class II
Controllability	None

1849 - Bitta 3 - floor

Code: 511445-00

PHOTOMETRIC DATA

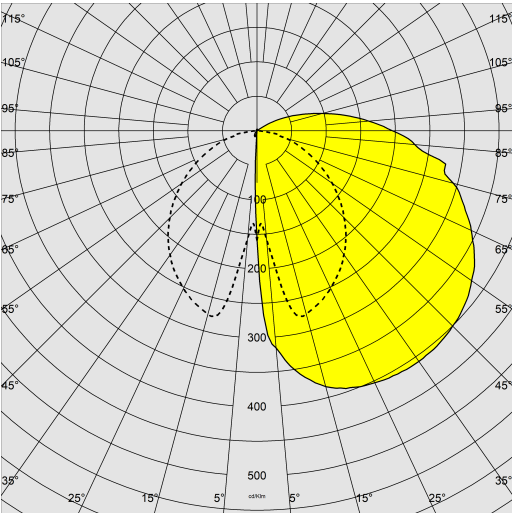

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	2394 lm
Power absorption (total) (W)	20 W
CCT	4000 K
Luminous efficacy (lm/W)	120 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	66



1849 - Bitta 3 - floor

Code: 511445-00

MATERIALS AND COLOURS

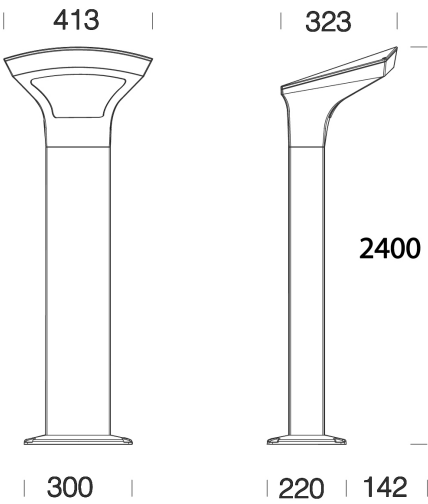

DOWNLOAD

MOUNTS

AssemblyInstructions bitta 04-23.pdf

DESIGNS

BIM 1849 Bitta 3.zip

TechnicalDrawing 1849.dxf



Housing	in die-cast aluminium.
Diffuser	in polycarbonate, transparent, anti-glare, shatterproof and V2 self-extinguishing, UV stabilised.
Ground connection (base)	in die-cast aluminium.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint., Anthracite = RAL 7021
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Anthracite
Equipment	- with air circulation valve. - complete with waterproof connector for line connection.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	D

WARRANTY

After sales warranty	3 yr
----------------------	------