

1681 - Floor TOTAL INOX - adjustable - FL

Code: 530418-00



Gamma Floor, one further step towards a more technical lighting of surfaces.
Accent lighting emphasises details and adds a third dimension to objects.
Both classic and modern styles produce the same effect.



GENERAL INFORMATION

Article	1681 - Floor TOTAL INOX - adjustable - FL
Code	530418-00

DIMENSIONS AND WEIGHT

Height (mm)	194 mm
Diameter (Ø) (mm)	255 mm
Weight (Kg)	4.4 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Insulation class	Class I
Controllability	None

1681 - Floor TOTAL INOX - adjustable - FL

Code: 530418-00

PHOTOMETRIC DATA

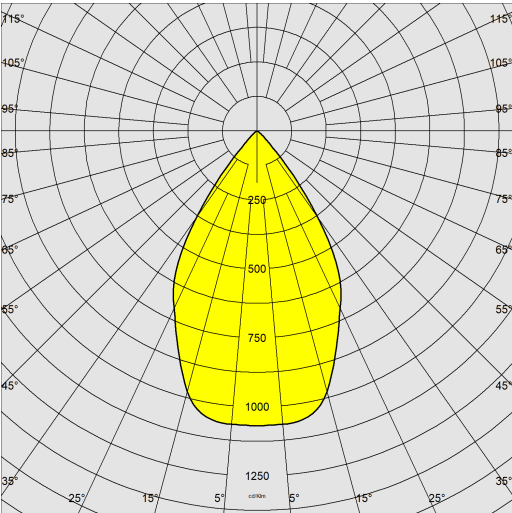

Lighting source	LED COB
CRI	80
Luminous flux (output) (lm)	3310 lm
Power absorption (total) (W)	26 W
CCT	4000 K
Luminous efficacy (lm/W)	127 lm/W
Beam angle	60 °
LED flux maintenance	50000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK10
Max load	2000 kg
Walkover	True
Driveover	True
IP	68

1681 - Floor TOTAL INOX - adjustable - FL

Code: 530418-00

MATERIALS AND COLOURS

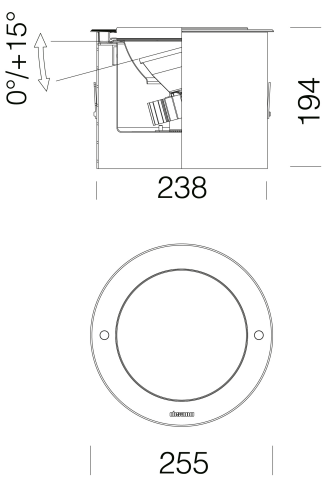

Housing	in AISI 304 stainless steel.
Optics	in high-performance metallised polycarbonate. Adjustable with graduated brackets max. 0/+15°.
Diffuser	tempered glass, 15 mm thick, resistant to thermal shock, impact and static loads.
Colour	Stainless steel
driveway lamp. Keep clear. Luminous flux maintenance 70%: 100.000h (L70B50) o luminous flux maintenance 90%: 50.000h (L90B10).	

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 2000 kg.

DOWNLOAD

MOUNTS

AssemblyInstructions 1680-1681 03-25.pdf

DESIGNS

TechnicalDrawing 1680-81.dxf

WARRANTY

After sales warranty	3 yr
----------------------	------

