




## 1823 - Miniquadro

Code: 530425-00

### PHOTOMETRIC DATA

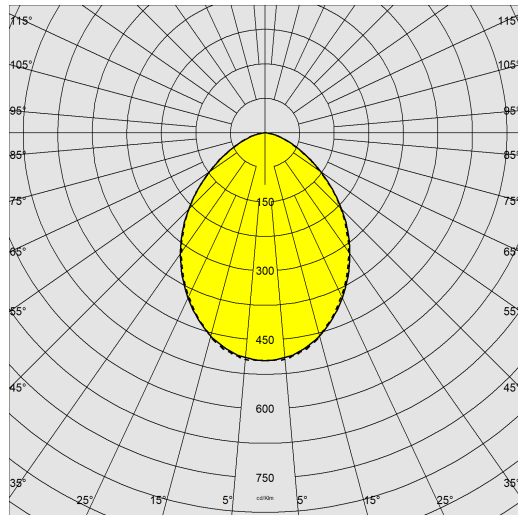

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	1540 lm
Power absorption (total) (W)	9 W
CCT	4000 K
Luminous efficacy (lm/W)	140 lm/W
LED flux maintenance	50000 hr, L 80, B 20


### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK09
Max load	2000 kg
Walkover	True
Driveover	True
IP	67

# 1823 - Miniquadro

Code: 530425-00

## MATERIALS AND COLOURS

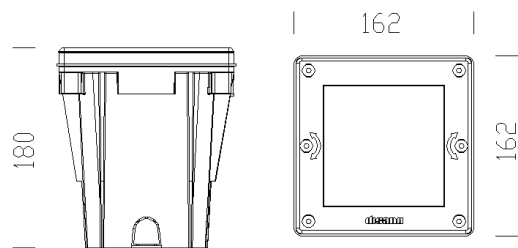

Housing	in black nylon. Frame in AISI 304 stainless steel. With outer shell in nylon.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 12 mm thick, resistant to thermal shock, impact and static loads.
Colour	Stainless steel
Equipment	silicone rubber gaskets. with power supply unit with constant current A= 350mA.  driveway lamp. Keep clear.

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 40KN equal to 2000 kg.
Energy Label	E

## DOWNLOAD

### MOUNTS

[AssemblyInstructions miniquadro 04-23.pdf](#)

### DESIGNS

[TechnicalDrawing 1820.dxf](#)



## WARRANTY

After sales warranty	3 yr
----------------------	------