


## 1689 - Floor - adjustable - LED RGBW DMX

Code: 530540-00

### GENERAL INFORMATION

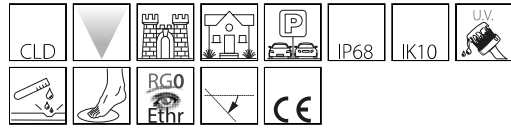

Article	1689 - Floor - adjustable - LED RGBW DMX
Code	530540-00

### DIMENSIONS AND WEIGHT

Height (mm)	200 mm
Diameter (Ø) (mm)	245 mm
Weight (Kg)	6.3 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class I
Controllability	None



Gamma Floor, one further step towards a more technical lighting of surfaces.

Accent lighting emphasises details and adds a third dimension to objects.

Both classic and modern styles produce the same effect.


It comes with new optics, more beam angles, +/- 20° adjustable reflectors, low installation thickness and new lighting accessories



# 1689 - Floor - adjustable - LED RGBW DMX

Code: 530540-00

## PHOTOMETRIC DATA

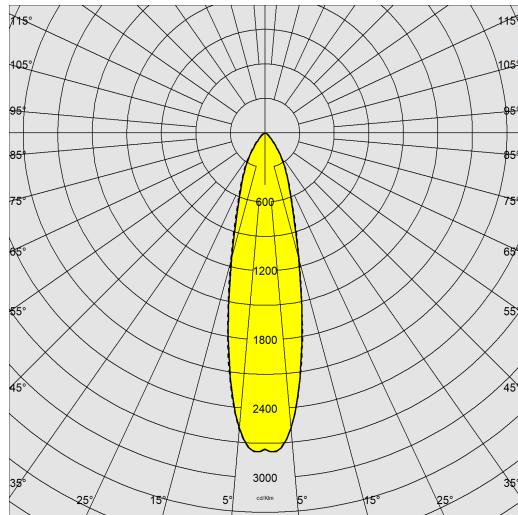

Lighting source	LED RGBW
Luminous flux (output) (lm)	630 lm
Power absorption (total) (W)	56 W
CCT	4000 K
Beam angle	26 °
LED flux maintenance	50000 hr, L 80, B 20

## MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK10
Max load	4000 kg
Walkover	True
Driveover	True
IP	68



# 1689 - Floor - adjustable - LED RGBW DMX

Code: 530540-00

## MATERIALS AND COLOURS

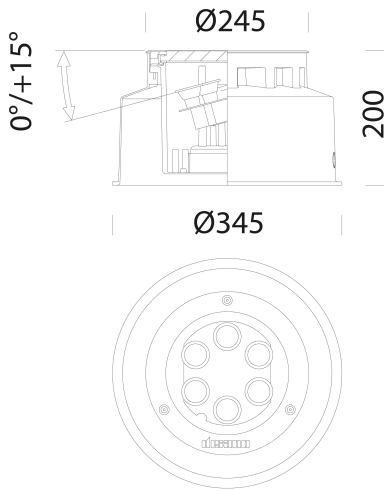

## DOWNLOAD

### MOUNTS

[AssemblyInstructions 1689 FLOOR LED - RGBW - DMX.pdf](#)

### DESIGNS

[TechnicalDrawing 1689.dxf](#)



Housing	in die-cast aluminium with outer shell in fibreglass nylon, frame in AISI 316L stainless steel.
Optics	in high-performance metallised polycarbonate. Adjustable with graduated brackets max. 0/+15°.
Diffuser	tempered glass, 15 mm thick, resistant to thermal shock, impact and static loads.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Stainless steel
Equipment	<ul style="list-style-type: none"> <li>- standard with flush-mounted boxes.</li> <li>- silicone rubber sealing gasket.</li> <li>- in fibreglass nylon cable gland diam. 1/2 inch gas.</li> <li>- anti-seize bolts</li> </ul>
driveway lamp. Keep clear.	

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 4000 kg.
Energy Label	E

## GEAR

Upon request	the luminaire can be supplied with stand-alone programming and customised DMX address.
--------------	--


## WARRANTY

After sales warranty	3 yr
----------------------	------

## 1689 - Floor - adjustable - LED RGBW DMX

---


Code: 530540-00



**399 Connector for continuous light line**



**. DOP Controller**



**IP65 DMX Box**