


2612 - Ground - with convex screen and radial slat design

Code: 530630-00

GENERAL INFORMATION

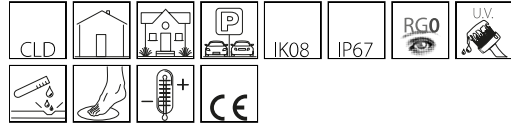

Article	2612 - Ground - with convex screen and radial slat design
Code	530630-00

DIMENSIONS AND WEIGHT

Height (mm)	93 mm
Diameter (Ø) (mm)	296 mm
Weight (Kg)	2.5 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None




The family of Disano residential luminaires is expanded with the addition of Ground, a brand-new lamp for floor, wall, or ceiling applications without the need for recessed installation or flooring works. The LED technology of its light sources ensures excellent performance accompanied by high efficiency and low energy costs.



2612 - Ground - with convex screen and radial slat design

Code: 530630-00

PHOTOMETRIC DATA

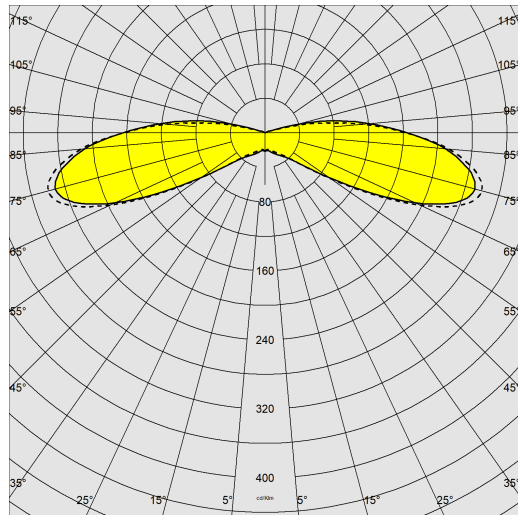

Lighting source	LED COB
CRI	90
Luminous flux (output) (lm)	144 lm
Power absorption (total) (W)	15 W
CCT	4000 K
Luminous efficacy (lm/W)	10 lm/W
LED flux maintenance	50000 hr, L 70, B 50

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	67



2612 - Ground - with convex screen and radial slat design

Code: 530630-00

MATERIALS AND COLOURS

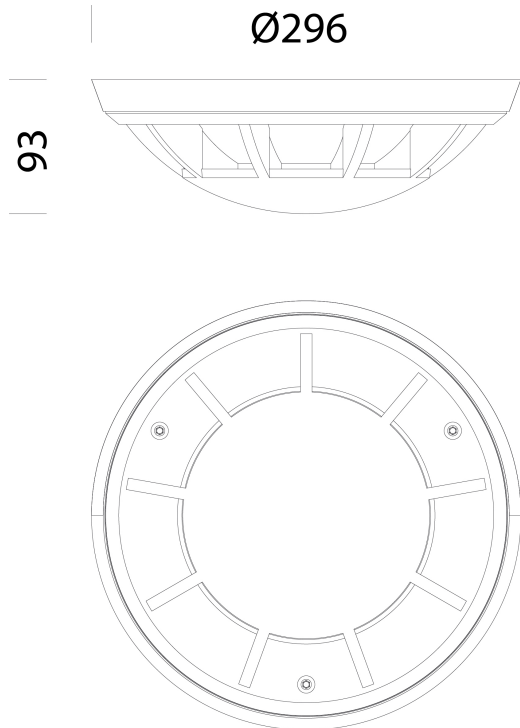

Housing	in die-cast aluminium.
Diffuser	semi-spherical glass, resistant to thermal shock and impact.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Graphite
Equipment	cable gland in PG11 nylon and designed for continuous row mounting. driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS

[AssemblyInstructions ground 04-23.pdf](#)

DESIGNS

[TechnicalDrawing 2612.dxf](#)

[TechnicalDrawing3D disano 2612 ground.3ds](#)

