


1622 - Starled - round

Code: 530691-00

GENERAL INFORMATION

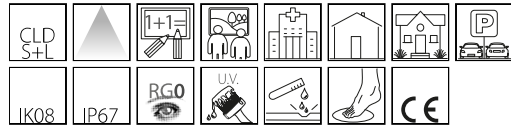

Article	1622 - Starled - round
Code	530691-00

DIMENSIONS AND WEIGHT

Height (mm)	90 mm
Diameter (Ø) (mm)	83 mm
Weight (Kg)	0.2 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	DC
Min Voltage (V)	24 V
Max Voltage (V)	24 V
Frequency (Hz)	0 Hz
Wiring name	CLD-S+L
Wiring	power supply 220-240V 50/60Hz with external transformer acc. 179. Cable with insulation class 3.
Power factor	≥0.9
Insulation class	Class III
Controllability	None




1622 Starled - round



1622 - Starled - round

Code: 530691-00

PHOTOMETRIC DATA

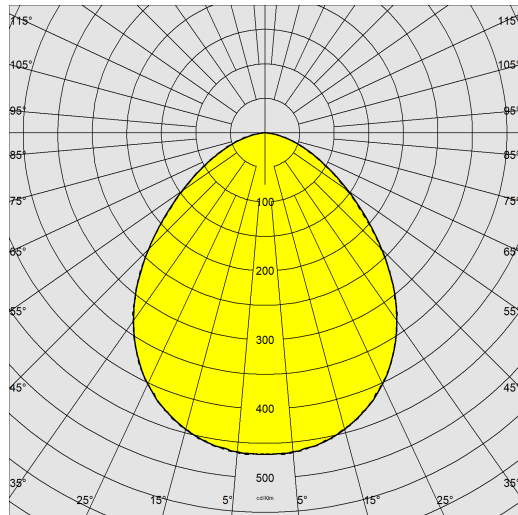

Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	28 lm
Power absorption (total) (W)	0.6 W
CCT	4000 K
Luminous efficacy (lm/W)	47 lm/W
LED flux maintenance	0 hr, L 0, B 0

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	67



1622 - Starled - round

Code: 530691-00

MATERIALS AND COLOURS

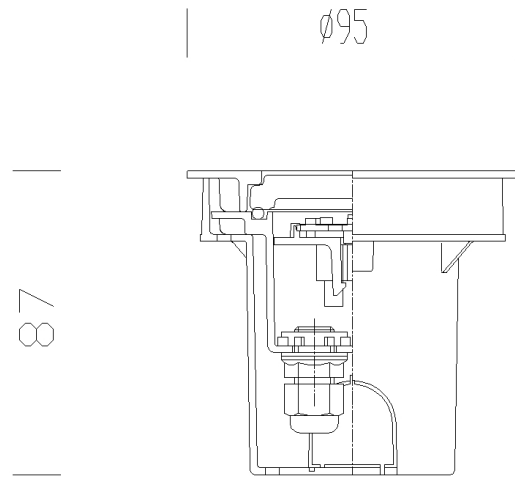

Housing	in glass sphere nylon, shatterproof, frame in die-cast aluminium.
Diffuser	matt glass, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Graphite
Equipment	silicone and EPDM rubber sealing gasket.
	driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 40KN equal to 2000 kg.
Energy Label	E

DOWNLOAD

MOUNTS

[AssemblyInstructions 1622-37-38 07-23.pdf](#)

DESIGNS

[TechnicalDrawing 1622.dxf](#)




WARRANTY

After sales warranty	3 yr
----------------------	------

1622 - Starled - round

Code: 530691-00



179 IP677 CC wiring