


1871 - Midifloor LED fullcolor - adjustable

Code: 530790-00

GENERAL INFORMATION

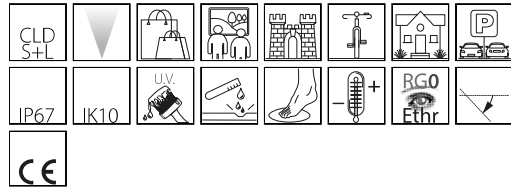

Article	1871 - Midifloor LED fullcolor - adjustable
Code	530790-00

DIMENSIONS AND WEIGHT

Height (mm)	100 mm
Diameter (Ø) (mm)	140 mm
Weight (Kg)	1.1 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Voltage (V)	230 V
Frequency (Hz)	50 Hz
Wiring name	CLD-S+L
Power factor	≥0.9
Insulation class	Class III
Controllability	None



Accent lighting emphasises details and adds a third dimension to objects. Works well in both classic and modern styles producing the same effect.



1871 - Midifloor LED fullcolor - adjustable

Code: 530790-00

PHOTOMETRIC DATA



Lighting source	LED RGB Fullcolor
Power absorption (total) (W)	0 W
CCT	0 K
LED flux maintenance	50000 hr, L 70, B 50


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK10
Max load	3000 kg
Walkover	True
Driveover	True
IP	67

1871 - Midifloor LED fullcolor - adjustable

Code: 530790-00

MATERIALS AND COLOURS

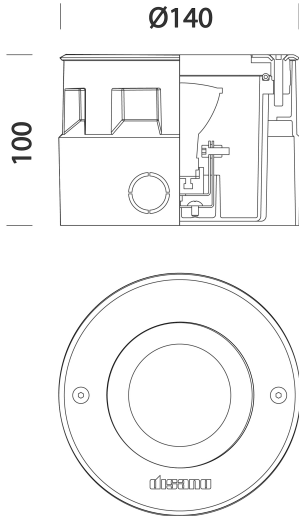

DOWNLOAD

MOUNTS

[AssemblyInstructions midifloor 10-22.pdf](#)

DESIGNS

[TechnicalDrawing 18711872.dxf](#)



Housing	in die-cast aluminium with outer shell in fibreglass nylon, frame in AISI 316L stainless steel.
Diffuser	tempered glass, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Colour	Stainless steel
Equipment	<ul style="list-style-type: none">- standard with flush-mounted boxes.- silicone rubber sealing gasket.- in fibreglass nylon cable gland diam. 1/2 inch gas.- anti-seize bolts
	driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0 Ethr
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------

1871 - Midifloor LED fullcolor - adjustable

Code: 530790-00



62 DMX amplifier re-modulator



63 IP67 box LED RGB + DMX driver



61 IP67 watertight box