


1635 - Microfloor LED RGB Fullcolor

Code: 530800-00

GENERAL INFORMATION

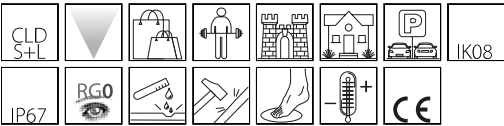

1635 Microfloor LED RGB Fullcolor



Article	1635 - Microfloor LED RGB Fullcolor
Code	530800-00

DIMENSIONS AND WEIGHT

Height (mm)	86 mm
Diameter (Ø) (mm)	120 mm
Weight (Kg)	0.4 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-S+L
Power factor	≥0.9
Insulation class	Class III
Controllability	None

1635 - Microfloor LED RGB Fullcolor

Code: 530800-00

PHOTOMETRIC DATA



Lighting source	LED RGB Fullcolor
CRI	70
Power absorption (total) (W)	4.5 W
CCT	0 K
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
Max load	2000 kg
Walkover	True
Driveover	True
IP	67

1635 - Microfloor LED RGB Fullcolor

Code: 530800-00

MATERIALS AND COLOURS

Housing	in fibreglass nylon, frame in AISI 316 stainless steel.
Diffuser	tempered glass, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Colour	Aluminium, Stainless steel
Equipment	silicone and EPDM rubber sealing gasket.
	driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

GEAR

Upon request	Power supply unit with constant current power to be purchased separately A= 350mA. (code 986511-00/986512-00)
--------------	---

WARRANTY

After sales warranty	3 yr
----------------------	------

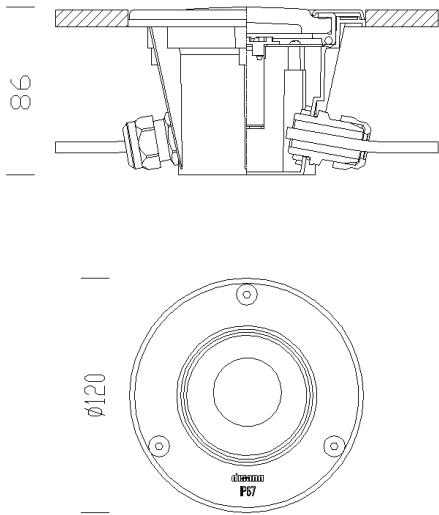

DOWNLOAD

MOUNTS

[AssemblyInstructions microfloor 10-22.pdf](#)

[AssemblyInstructions 1635 04-22.pdf](#)






DESIGNS

[TechnicalDrawing 1635.dxf](#)



1635 - Microfloor LED RGB Fullcolor

Code: 530800-00

	62 DMX amplifier re-modulator		314 Wall frame
	63 IP67 box LED RGB + DMX driver		313 Outer shell
	61 IP67 watertight box		