

## 504 - Single arm


Code: 991262-00

### GENERAL INFORMATION

|         |                  |
|---------|------------------|
| Article | 504 - Single arm |
| Code    | 991262-00        |

### DIMENSIONS AND WEIGHT

|             |        |
|-------------|--------|
| Length (mm) | 900 mm |
| Width (mm)  | 100 mm |
| Weight (Kg) | 8.5 kg |

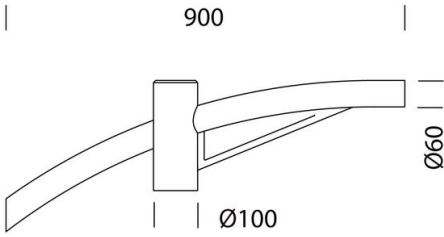

in steel, suitable for installation on poles with Ø60 connection.



## 504 - Single arm

---


Code: 991262-00



## 504 - Single arm

Code: 991262-00

### MATERIALS AND COLOURS

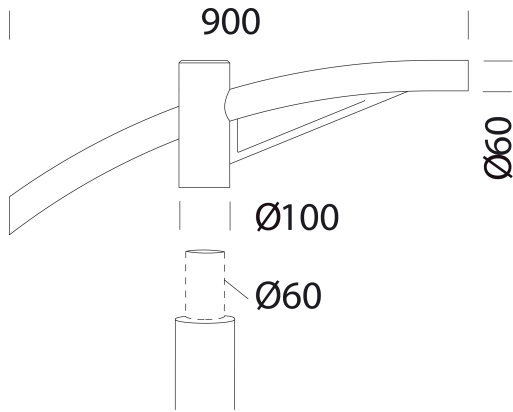

|                 |   |
|-----------------|---|
| Housing         | in steel, suitable for installation on poles with Ø60 connection. |
| Pole connection | 60mm  |
| Colour          | Grey9007  |

### WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 0 yr |
|----------------------|------|

### DOWNLOAD

#### DESIGNS

TechnicalDrawing 504k.dxf



## 504 - Single arm

Code: 991262-00



3472 Giovi M1 - street



3269 Mini Stelvio FX T5 - wide beam



3278 Mini Stelvio FX T3 - wide beam street



3376 Mini Stelvio - high performance - large areas




3285 Rolle - high performance



3286 Rolle - high performance



3476 Mini Giovi W2 - street



3477 Mini Giovi N1 - cycle lane




3478 Mini Giovi M1 - street




3479 Mini Giovi T4 - large areas




3480 Mini Giovi - high performance - large areas



3481 Mini Giovi - high performance - street ME






3482 Mini Giovi - high performance - cycle lane



3483 Mini Giovi AMBRA - large areas

## 504 - Single arm

Code: 991262-00

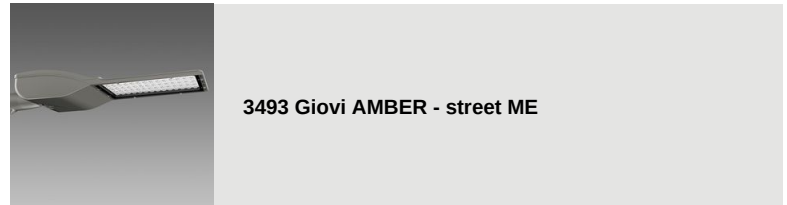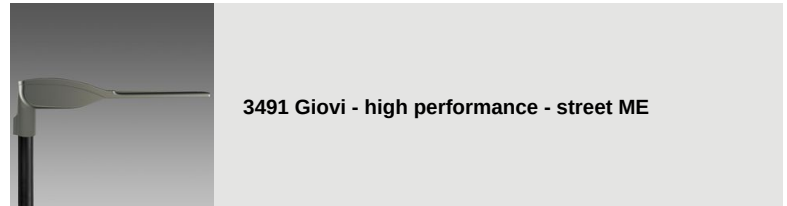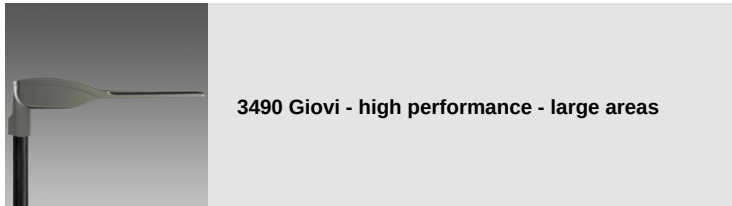




**3375 Mini Stelvio - high performance - street**



**3280 Rolle - T1**



**3283 Rolle - T4**



**3284 Rolle - T5**



**3290 Sella 1 - ST**



**3291 Sella 1 - STWB**



**3292 Sella 1 - asymmetric 45°**



**3293 Sella 1 - asymmetric 60°**



**3294 Sella 1 - cycle lanes**



**3295 Sella 1 - large areas**



**3296 Sella 1 - HP**



**3297 Sella 1 - HP -pedestrian crossings LH**



**3298 Sella 1 - HP -pedestrian crossings RH**



**3390 Sella 2 - ST**



**3391 Sella 2 - STWB**



**3392 Sella 2 - asymmetric 45°**



**3393 Sella 2 - asymmetric 60°**



**3395 Sella 2 - large areas**



**3396 Sella 2 - HP**



**3270 Stelvio 1 - Plus - LED**



**3274 Stelvio 2 - Plus - LED asymmetric**



**3370 Stelvio - high performance - street**



**3374 Stelvio - high performance - large areas**



**3475 Mini Giovi W1 - street**



**3275 Mini Stelvio - street**



**3276 Mini Stelvio - asymmetric**



**3281 Rolle - T2**



**3282 Rolle - T3**



Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Thursday, August 29, 2024