


745 - Oblò J 2.0 - DALI 2

Code: 112600-3941

PHOTOMETRIC DATA

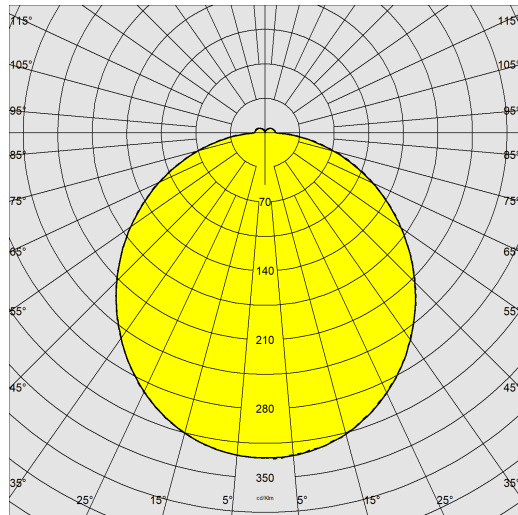

Distribution type	Plafone
Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	1863 lm
Power absorption (total) (W)	16 W
CCT	3000 K
Luminous efficacy (lm/W)	116 lm/W
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



745 - Oblò J 2.0 - DALI 2

Code: 112600-3941

MATERIALS AND COLOURS



Ø 280



63

DOWNLOAD

MOUNTS

[AssemblyInstructions 745 10-22.pdf](#)

DESIGNS

[TechnicalDrawing obloj.dxf](#)



Housing	vandal-resistant, self-extinguishing polycarbonate.
Diffuser	In clear polycarbonate, anti-dazzle, vandal resistant
Colour	White
Equipment	supplied with bracket for ceiling/wall installation.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN 60598-1. They have a degree of protection according to the EN 60529 standard.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------