


## 745 - Oblò J 2.0 - EM EC

Code: 112600-3950

### GENERAL INFORMATION

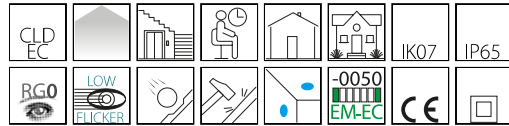

Article	745 - Oblò J 2.0 - EM EC
Code	112600-3950

### DIMENSIONS AND WEIGHT

Height (mm)	63 mm
Diameter (Ø) (mm)	280 mm
Weight (Kg)	1.5 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-EC
Power factor	>0.9
Insulation class	Class II
Controllability	None



Oblò J 2.0 is Disano's new easy-to-install wall/ceiling light fixture featuring an extremely resistant self-extinguishing polycarbonate housing (IK07) with a greater degree of protection (IP65) and double insulation. It comprises high-efficiency LED sources that ensure notable energy savings.

Its minimalist and compact design makes it suitable for any outdoor application, especially balconies, porches, and terraces, as well as for indoor use, such as condominium staircases, landings, and common areas. This ceiling fixture has colour temperatures of 3000K and 4000K and a high colour rendering index (CRI≥80), guaranteeing effective, pleasant, and safe lighting.



## 745 - Oblò J 2.0 - EM EC

Code: 112600-3950

### PHOTOMETRIC DATA



Distribution type	Plafone
Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	1863 lm
Power absorption (total) (W)	16 W
CCT	3000 K
Luminous efficacy (lm/W)	116 lm/W
LED flux maintenance	50000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



# 745 - Oblò J 2.0 - EM EC

Code: 112600-3950

## MATERIALS AND COLOURS



Ø 280



69

## DOWNLOAD

### MOUNTS

[AssemblyInstructions 745 10-22.pdf](#)

### DESIGNS

[TechnicalDrawing obloj.dxf](#)



Housing	vandal-resistant, self-extinguishing polycarbonate.
Diffuser	In clear polycarbonate, anti-dazzle, vandal resistant.
Colour	White supplied with bracket for ceiling/wall installation.
Equipment	EM EC: with emergency wiring supplied by centralised power unit: permanent luminaire, with power supply unit operating in AC/DC, powered by a central emergency unit (NOT incorporated into the luminaire).

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN 60598-1. They have a degree of protection according to the EN 60529 standard.
Energy Label	C

## WARRANTY

After sales warranty	5 yr
----------------------	------