


840 - LED Panel R - UGR<19 - CRI>90

Code: 150209-0041



The superior quality of LED lighting is now more affordable and accessible thanks to a benchmarking product that offers, at contained costs, the ideal light for offices, shopping centres, hotels and healthcare facilities and in general all spaces where continuous lighting is necessary. It is the best and easiest way to get one of today's most advanced technology in interior lighting solutions. The presence of a LED source is not always synonym with excellent performance. The long service life and optimal light output of a lighting system also depends on the use of top-notch materials that are tested, controlled and selected with care to maintain lighting and aesthetic quality over time: lumen maintenance, perfect colour rendering, no glare and anti-yellowing of components. A special slab fitted between the LED source and the diffuser is responsible for the operation, quality and amount of light emitted from the light panel. This slab is made in PMMA (polymethyl methacrylate), a polymer that keeps its characteristics unaltered and prevents the lens from yellowing. Other similar fixtures use materials such as, for example, polystyrene (PS), which do not have the same properties and characteristics, and are therefore available at much lower costs. The result? Unlike the PMMA, the slab in PS becomes yellow after 6000-8000 hours of operation, decreasing both the amount and the quality of the light emitted, even during the day, when the fixture is switched off, as well as compromising the perfect integration of the white panel into the false ceiling, affecting the overall appearance of the installation. Thanks to this slab in PMMA, our panels can fully benefit from the lighting advantages ensured by the most advanced LED sources and keep them unaltered in time: lumen maintenance at 80% for 50000 hours (L80B20), perfect colour rendering index (CRI≥80 or CRI<90), no glare (UGR<19) and certified low flickering level.

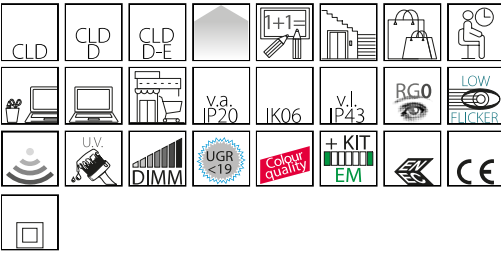

GENERAL INFORMATION

Article	840 - LED Panel R - UGR<19 - CRI>90
Code	150209-0041

DIMENSIONS AND WEIGHT

Length (mm)	1195 mm
Width (mm)	295 mm
Height (mm)	12 mm
Weight (Kg)	3.565 kg

INSTALLATION

Recessed dimensions - Length (mm)	1190 mm
Recessed dimensions - Width (mm)	290 mm


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-D-D
Control interface	DALI
Power factor	≥0.95
Insulation class	Class II
Controllability	Yes (External control)

840 - LED Panel R - UGR<19 - CRI>90

Code: 150209-0041

PHOTOMETRIC DATA

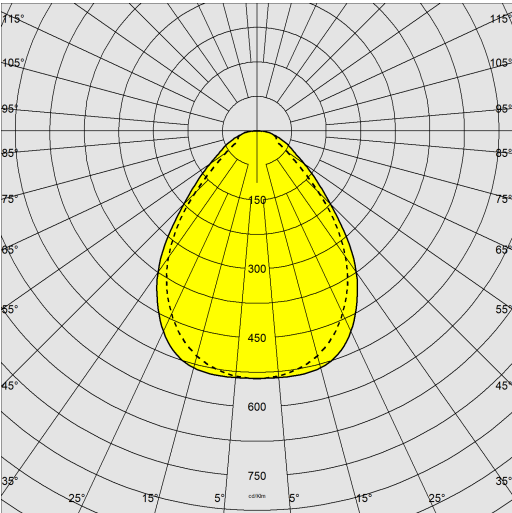

Lighting source	LED
CRI	>90
Luminous flux (output) (lm)	3318 lm
Power absorption (total) (W)	33 W
CCT	4000 K
Luminous efficacy (lm/W)	101 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464. Art 150211-00: not UGR<19
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM3
LED flux maintenance	50000 hr, L 80, B 20


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK06
IP (vl)	43
IP (va)	20

840 - LED Panel R - UGR<19 - CRI>90

Code: 150209-0041

MATERIALS AND COLOURS

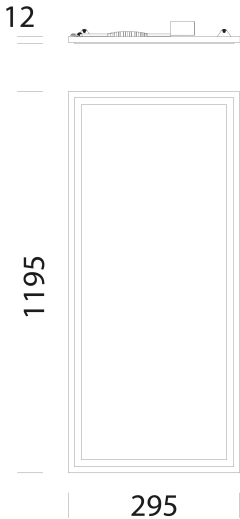

Housing	body in steel sheet and frame in aluminium.
Diffuser	in high transmittance prismatic technopolymer. Internal PMMA slab.
Colour	White
Equipment	Ceiling lighting fixture with external driver; it can be easily housed in false ceilings.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

GEAR

Upon request	- DIMM DALI CLD-D wiring (subcode -0041) - CLD-D (PUSH) (subcode -0045)
--------------	--

WARRANTY

After sales warranty	5 yr
----------------------	------

DOWNLOAD

- MOUNTS
- AssemblyInstructions EM-KIT 600 03-22.pdf
 - AssemblyInstructions led panel 03-23.pdf

- DESIGNS
- BIM 840 LED Panel R - 20200211
 - TechnicalDrawing 840rr.dxf




840 - LED Panel R - UGR<19 - CRI>90


Code: 150209-0041




587 Presence and light sensor




595 Frame 1200x300 h 45 mm



600 EM power supply kit



907 Springs



320 Cord



2520 Simple suspension