

Code: 22044012-00



The main feature of this spotlight is the new colour-changing/output power technology: with the two built-in switches positioned on the fixture's body, you can select 5 different colour temperatures, adjusting to most installations. (2700/3000/3500/4000/5700K)

Another unique feature of this spotlight is the option to choose the beam angle with an adjustment ring on the fixture's body. In a very simple and intuitive way, you can obtain the desired light beam within a range from 20° to 50°, including intermediate positions, in a smooth and gradual manner, maintaining excellent visual comfort.



GENERAL INFORMATION

Article	Zoom big - MULTICOLOR
Code	22044012-00

DIMENSIONS AND WEIGHT

Length (mm)	190 mm
Width (mm)	90 mm
Height (mm)	162 mm
Weight (Kg)	1.1 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Insulation class	Class I
Controllability	Yes (Integrated)
Integrated Function	Adjustable CCT, Flux/power settings with Dip Switch

Zoom big - MULTICOLOR

Code: 22044012-00

PHOTOMETRIC DATA

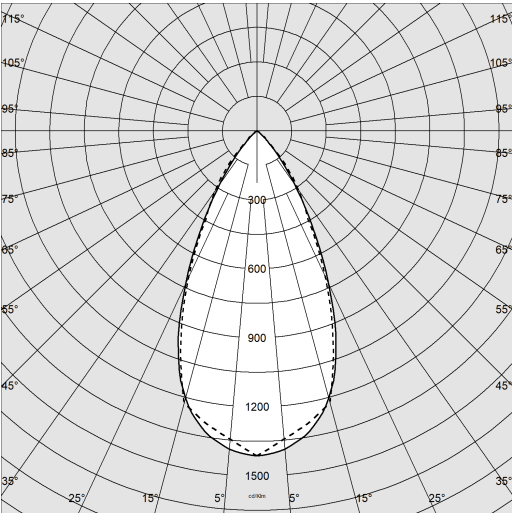

Lighting source	LED COB
CRI	>90
Luminous flux (output) (lm)	3061 lm
Power absorption (total) (W)	40 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	20



Zoom big - MULTICOLOR

Code: 22044012-00

MATERIALS AND COLOURS


Housing	in die-cast aluminum.
Coating	powder coated with UV resistant polyester epoxy paint.
Colour	White

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

WARRANTY

After sales warranty	3 yr
----------------------	------

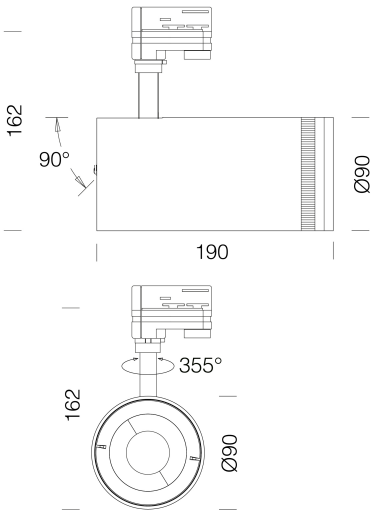

DOWNLOAD

MOUNTS

AssemblyInstructions Zoom Multicolor rev0.pdf

DESIGNS

TechnicalDrawing 44012.dxf



Zoom big - MULTICOLOR

Code: 22044012-00



Acc. for recessed



Acc. base for universal adapter and DIMM 1/10V-DALI