

1887 - Rodio HP - asymmetric

Code: 414758-39



Versatility, efficiency and outstanding light quality define the Rodio family, a range of floodlights available in different wattages and optical distributions to meet every application requirement. Ideal for enhancing architectural façades, complementing street lighting, illuminating sports facilities and residential areas, Rodio floodlights provide a reliable solution for any outdoor lighting project. The range includes versions with asymmetric, narrow-beam and wide-distribution optics, as well as specific diffused and street-lighting distributions, ensuring maximum design flexibility.



GENERAL INFORMATION

Article	1887 - Rodio HP - asymmetric
Code	414758-39

DIMENSIONS AND WEIGHT

Length (mm)	568 mm
Width (mm)	333 mm
Height (mm)	90 mm
Weight (Kg)	8.1 kg

INSTALLATION

Surface exposed to wind (mm)	L 45500 mm², F 152900 mm²
------------------------------	---------------------------


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Surge protector (common) (EN 61547)	10 kV, 6 kV
Insulation class	Class I
Controllability	None

1887 - Rodio HP - asymmetric

Code: 414758-39

PHOTOMETRIC DATA

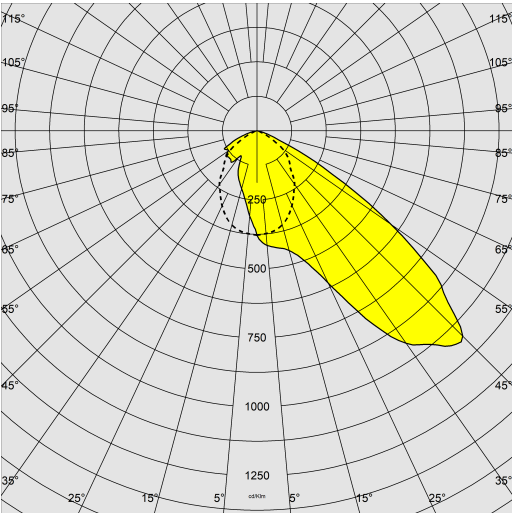

Distribution type	Asymmetric
Lighting source	LED
CRI	80
Luminous flux (output) (lm)	28173 lm
Power absorption (total) (W)	200 W
CCT	3000 K
Luminous efficacy (lm/W)	141 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM4
Asymmetry degrees	45 °
LED flux maintenance	100000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK09
IP	66
Ambient temperature - min	-40 °C
Ambient temperature - max	50 °C

1887 - Rodio HP - asymmetric

Code: 414758-39

MATERIALS AND COLOURS

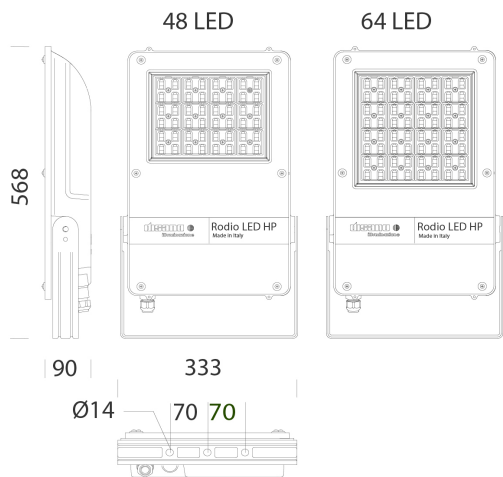

DOWNLOAD

MOUNTS

AssemblyInstructions rodio 07-26.pdf

DESIGNS

BIM 1887 HP asymmetric 11-23.zip

TechnicalDrawing 1887-88-91.dxf



Housing	in die-cast aluminium with cooling fins integrated in the cover.
Optics	in high-performance PMMA resistant to high temperatures and UV rays.
Diffuser	a
Heat sink	the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	- Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea. - Upon request: conformal coating compliant, subcode -38 with high chemical resistance for environments with a high concentration of chlorine
Colour	Graphite
Equipment	- with galvanised and painted bracket - waterproof connector for quick installation with no need to open the fixture - EN 61547 compliant surge protection - anti-condensation valve - silicone rubber gasket - external screws and bolts in stainless steel

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

GEAR

Upon request	- protection of up to 10kV. Virtual midnight (subcode -30) - amber LED (subcode -73 - 2200K) - possibility of central light management or with external presence/light sensors. special version (with conformal coating treatment with subcode -38) featuring high chemical resistance for environments with high chlorine content.
--------------	---

WARRANTY

After sales warranty	5 yr
----------------------	------

1887 - Rodio HP - asymmetric

Code: 414758-39



350 Protection grid - Rodio HP-HE



333 Connection for diam. 60 pole



334 Connection for diam. 76 pole