


## 1556 - Brick - direct and indirect light

Code: 420601-00

### GENERAL INFORMATION

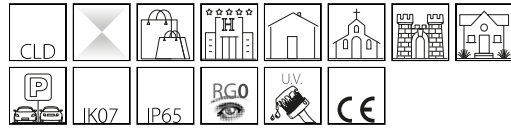

Article	1556 - Brick - direct and indirect light
Code	420601-00

### DIMENSIONS AND WEIGHT

Length (mm)	270 mm
Width (mm)	125 mm
Height (mm)	113 mm
Weight (Kg)	2.3 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None



The façade of public buildings, churches or even residences add great artistic and symbolic value to a place. Light can enhance this value by seamlessly blending into the surrounding urban environment. However, this can be achieved only with efficient and reliable fixtures that can easily adjust to any setting.

This is why we designed Brick: with its modern and simple shape, especially suited to different architectonic contexts, this fixture does not simply light up routes, stairways, porticos, entrance halls and external architectural elements but it can also reveal them in all their artistic beauty.


Thanks to the multiple light effects, Brick, in the wall-mounted version, allows an excellent diffusion of light and creates spectacular settings.



## 1556 - Brick - direct and indirect light

Code: 420601-00

### PHOTOMETRIC DATA

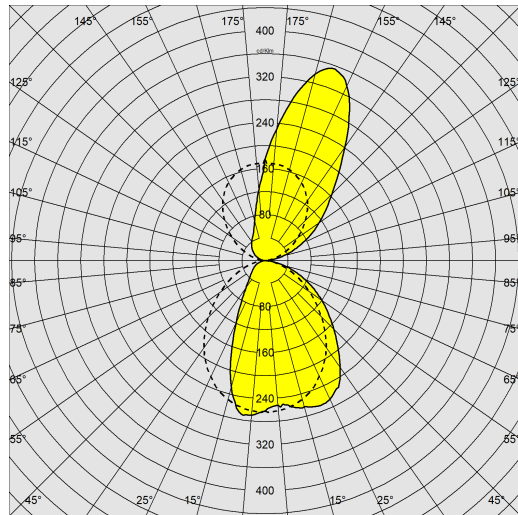

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	1440 lm
Power absorption (total) (W)	19 W
CCT	3000 K
Luminous efficacy (lm/W)	76 lm/W
LED flux maintenance	50000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



# 1556 - Brick - direct and indirect light

Code: 420601-00

## MATERIALS AND COLOURS

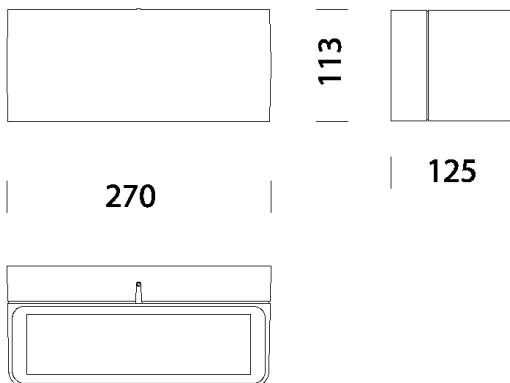

Housing	in die-cast aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	White
Equipment	- with wall mounting plate. - complete with waterproof connector for line connection.

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

## DOWNLOAD

### MOUNTS

[AssemblyInstructions brick 04-23.pdf](#)

### DESIGNS

[BIM 1556 Brick.zip](#)

[TechnicalDrawing 1556i.dxf](#)

[TechnicalDrawing3D disano 1556 brick.3ds](#)



## WARRANTY

After sales warranty	3 yr
----------------------	------