

## 1260 - Vega LED

Code: 420690-00

### GENERAL INFORMATION



Article	1260 - Vega LED
Code	420690-00

### DIMENSIONS AND WEIGHT

Length (mm)	240 mm
Width (mm)	180 mm
Height (mm)	180 mm
Weight (Kg)	1.3 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-S
Power factor	≥0.9
Insulation class	Class I
Controllability	None



The Vega wall sconce, one of Disano's most popular wall lamps, combines excellent material quality and distinctive design with LED technology, which guarantees energy savings and long life. The unique shape of its housing allows for simple and functional installations. Also available with presence sensor to enhance functionality and service life.



## 1260 - Vega LED

Code: 420690-00

### PHOTOMETRIC DATA

Lighting source	LED
CRI	80
CCT	0 K
LED flux maintenance	0 hr, L 0, B 0


### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



## 1260 - Vega LED

Code: 420690-00

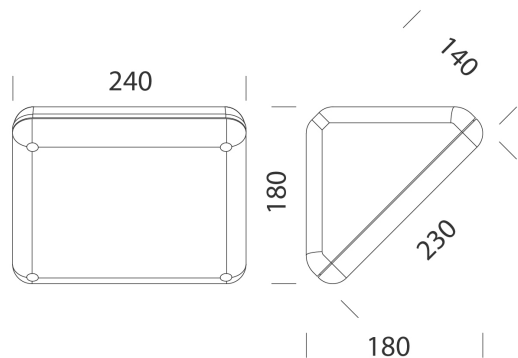

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions 1260 06-22.pdf](#)

#### DESIGNS

[TechnicalDrawing 1260b.dxf](#)



### MATERIALS AND COLOURS

Housing	thermoplastic material, shatterproof, UV stabilised, RAL7045 grey colour.
Optics	anodised and polished 99.85 aluminium.
Diffuser	in anti-glare matt polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing, externally smooth and dustproof.
Colour	Grey
Equipment	<ul style="list-style-type: none"><li>- complete with fixing plate.</li><li>- EPDM foam bowl gasket.</li><li>- external screws in galvanised stainless steel with black OR.</li></ul>

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

### WARRANTY

After sales warranty	3 yr
----------------------	------

## 1260 - Vega LED

Code: 420690-00



1266 Joint



995140-00



995141-00



995142-00



995143-00

1260 Self-adhesive pictograms



5 Fibreglass pole