


1282 - Meridiana LED

Code: 423099-00

GENERAL INFORMATION

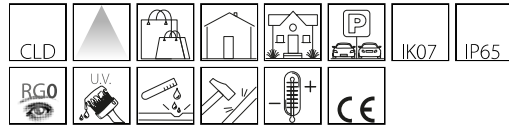

Article	1282 - Meridiana LED
Code	423099-00

DIMENSIONS AND WEIGHT

Length (mm)	375 mm
Width (mm)	224 mm
Height (mm)	329 mm
Weight (Kg)	3.1 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None




1282 Meridiana LED



1282 - Meridiana LED

Code: 423099-00

PHOTOMETRIC DATA

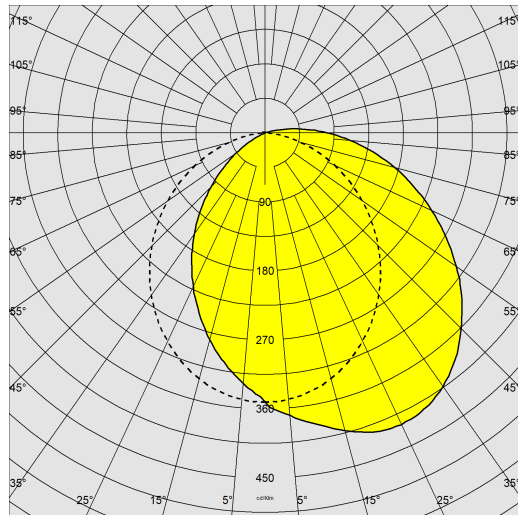

Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	1990 lm
Power absorption (total) (W)	17 W
CCT	4000 K
Luminous efficacy (lm/W)	117 lm/W
LED flux maintenance	50000 hr, L 70, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



1282 - Meridiana LED

Code: 423099-00

MATERIALS AND COLOURS

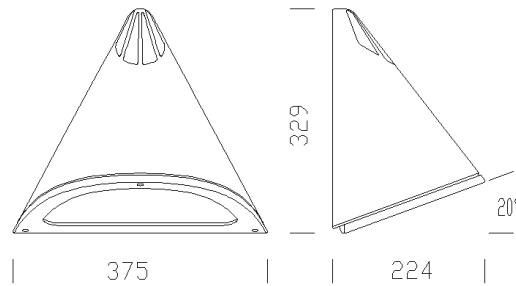

Housing	in die-cast aluminium.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Graphite
Equipment	<ul style="list-style-type: none">- during installation the frame stays attached via a safety hinge mechanism that prevents it from dropping down accidentally.- with wall mounting plate.- gasket in eco-friendly material.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS

[AssemblyInstructions meridiana 04-23.pdf](#)


DESIGNS

[TechnicalDrawing 1298.dxf](#)



1282 - Meridiana LED

Code: 423099-00



96 Connection for ø60 - Meridiana