


3590 - Ischia - rotosymmetric wide beam RW

Code: 424660-39



With its round, simple and modern design, ISCHIA recalls the ecological credentials of LED lighting making it ideal for illuminating parks and residential areas. ISCHIA LED is available in 3000 and 4000K colour temperatures and in amber, the colour temperature designed to reproduce the cosy ambient light associated with sunset. In this way, artificial light becomes a less invasive element in the environment, respecting the needs of the surrounding flora and fauna. Moreover, it is equipped to accept all the most advanced management and control system. The ISCHIA range includes luminaires with different photometric curves to achieve the best lighting performance in every pathway and setting.

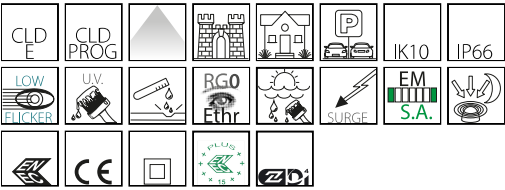

GENERAL INFORMATION

Article	3590 - Ischia - rotosymmetric wide beam RW
Code	424660-39

DIMENSIONS AND WEIGHT

Height (mm)	105 mm
Diameter (Ø) (mm)	500 mm
Weight (Kg)	4.9 kg

INSTALLATION

Diameter (Ø) of pole connector (mm)	60-60 mm
Surface exposed to wind (mm)	L 34500 mm², F 19700 mm²


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Surge protector (common) (EN 61547)	6 kV, 10 kV
Insulation class	Class II
Controllability	None

3590 - Ischia - roto-symmetric wide beam RW

Code: 424660-39

PHOTOMETRIC DATA

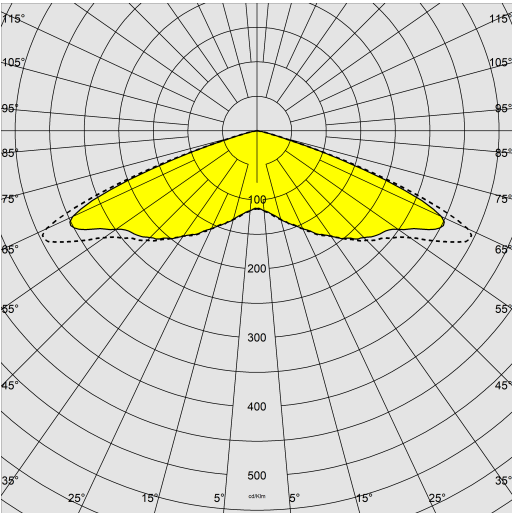

Distribution type	Roto-symmetric wide beam - 360°
Lighting source	LED
CRI	70
Luminous flux (output) (lm)	4510 lm
Power absorption (total) (W)	30 W
CCT	3000 K
Luminous efficacy (lm/W)	150 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM4
LED flux maintenance	100000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK10
IP	66
Ambient temperature - min	-30 °C
Ambient temperature - max	50 °C



3590 - Ischia - rotosymmetric wide beam RW

Code: 424660-39

MATERIALS AND COLOURS

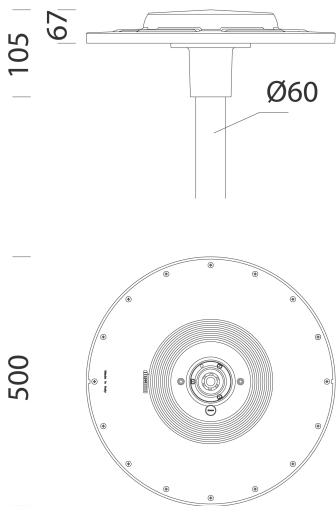

DOWNLOAD

MOUNTS

AssemblyInstructions ischia 01-23.pdf

DESIGNS

BIM 3590 RW 06-25.zip

TechnicalDrawing ischia.dxf



Housing	in die-cast aluminium.
Optics	in high-performance PMMA resistant to high temperatures and UV rays.
Diffuser	in polycarbonate, 2.5 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life.
Pole connection	die-cast aluminium. For poles with a diameter of 60 mm.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Graphite
Equipment	- waterproof connector for quick installation with no need to open the fixture. - anti-condensation valve. - temperature controller with auto-reset. - EN 61547 compliant surge protection. - CLD PROG built-in functions.
Registered Design DM/100271	

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	ENEC+, CE, ENEC, ZHAGA D4i
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	D

GEAR

Sensors	
Upon request	-Diffuser with opal finish: subcode -0026 -1-10V regulation: subcode -12 - Telemanagement by power line carrier subcode -0078

WARRANTY

After sales warranty	5 yr
----------------------	------

3590 - Ischia - rotosymmetric wide beam RW

Code: 424660-39



5 Fibreglass pole



1278 Conical



1481 steel conical pole to be buried



1480 steel conical pole with base



1478 Urban Pole to be buried



1477 Urban Pole - with base



1408 Fluted pole ø 100 with base



1409 Fluted pole ø 100



1508 Fluted pole ø 120 with base



1509 Fluted pole ø 120