


1685 - Floor - fixed - FS

Code: 530407-00

GENERAL INFORMATION

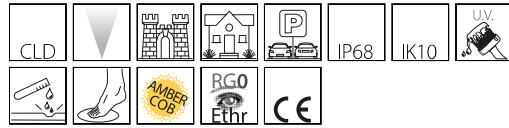

Article	1685 - Floor - fixed - FS
Code	530407-00

DIMENSIONS AND WEIGHT

Height (mm)	200 mm
Diameter (Ø) (mm)	245 mm
Weight (Kg)	4.4 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Insulation class	Class I
Controllability	None




Gamma Floor, one further step towards a more technical lighting of surfaces.
Accent lighting emphasises details and adds a third dimension to objects.
Both classic and modern styles produce the same effect.



1685 - Floor - fixed - FS

Code: 530407-00

PHOTOMETRIC DATA

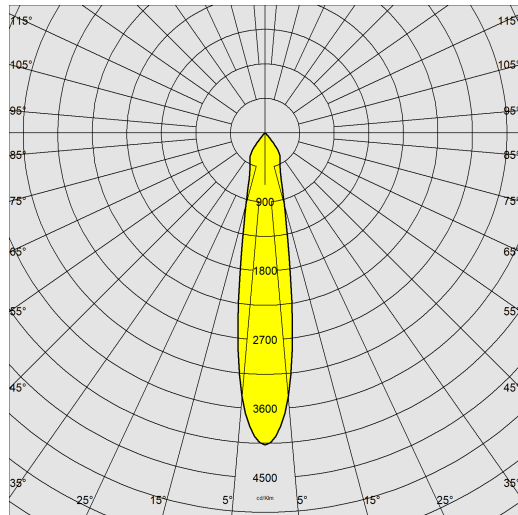

Lighting source	LED COB
CRI	80
Luminous flux (output) (lm)	3220 lm
Power absorption (total) (W)	26 W
CCT	4000 K
Luminous efficacy (lm/W)	124 lm/W
Beam angle	18 °
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK10
Max load	4000 kg
Walkover	True
Driveover	True
IP	68



1685 - Floor - fixed - FS

Code: 530407-00

MATERIALS AND COLOURS

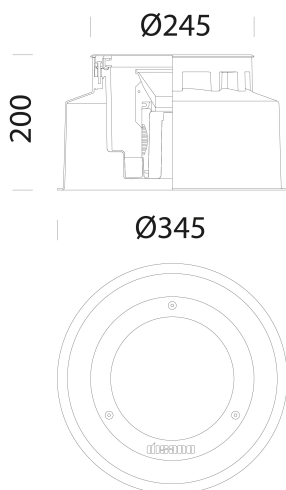

DOWNLOAD

MOUNTS

[AssemblyInstructions floor 10-23.pdf](#)

DESIGNS

[TechnicalDrawing 1685.dxf](#)



Housing	in die-cast aluminium with outer shell in fibreglass nylon, frame in AISI 316L stainless steel.
Optics	in high-performance metallised polycarbonate.
Diffuser	tempered glass, 15 mm thick, resistant to thermal shock, impact and static loads.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Stainless steel
Equipment	<ul style="list-style-type: none"> - standard with flush-mounted boxes. - silicone rubber sealing gasket. - in fibreglass nylon cable gland diam. 1/2 inch gas. - anti-seize bolts
	driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 4000 kg.
Energy Label	E

WARRANTY


After sales warranty	3 yr
----------------------	------

1685 - Floor - fixed - FS


Code: 530407-00



399 Connector for continuous light line



541 Alveolar screen - Floor



542 Prismatic slab - Floor



543 Frosted slab - Floor



544 Dome-shaped - Floor



545 Transparent slab - Floor