


## 745 - Oblò J 2.0 - EM 3h S.A.

Code: 112601-3128

### GENERAL INFORMATION

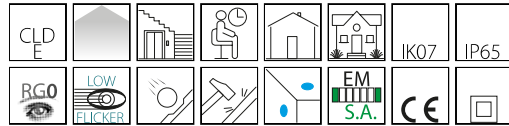

Article	745 - Oblò J 2.0 - EM 3h S.A.
Code	112601-3128

### DIMENSIONS AND WEIGHT

Height (mm)	63 mm
Diameter (Ø) (mm)	280 mm
Weight (Kg)	1 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-E
Power factor	>0.9
Insulation class	Class II
Controllability	None



Oblò J 2.0 is Disano's new easy-to-install wall/ceiling light fixture featuring an extremely resistant self-extinguishing polycarbonate housing (IK07) with a greater degree of protection (IP65) and double insulation. It comprises high-efficiency LED sources that ensure notable energy savings.


Its minimalist and compact design makes it suitable for any outdoor application, especially balconies, porches, and terraces, as well as for indoor use, such as condominium staircases, landings, and common areas. This ceiling fixture has colour temperatures of 3000K and 4000K and a high colour rendering index (CRI≥80), guaranteeing effective, pleasant, and safe lighting.



## 745 - Oblò J 2.0 - EM 3h S.A.

Code: 112601-3128

### PHOTOMETRIC DATA

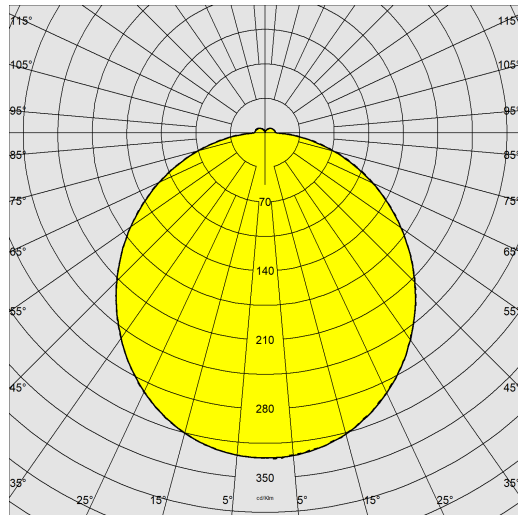

Distribution type	Plafone
Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	2695 lm
Power absorption (total) (W)	24 W
CCT	3000 K
Luminous efficacy (lm/W)	112 lm/W
LED flux maintenance	50000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	65
Ambient temperature - min	5 °C
Ambient temperature - max	35 °C



# 745 - Oblò J 2.0 - EM 3h S.A.

Code: 112601-3128

## MATERIALS AND COLOURS

Housing	vandal-resistant, self-extinguishing polycarbonate.
Diffuser	In clear polycarbonate, anti-dazzle, vandal resistant.
Colour	White
Equipment	supplied with bracket for ceiling/wall installation.

## EMERGENCY LIGHTING


Type of emergency	S.A.
Emergency luminous flux (%)	3
Emergency operation time	3h

## STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN 60598-1. They have a degree of protection according to the EN 60529 standard.
Energy Label	C

## WARRANTY

After sales warranty	5 yr
----------------------	------



Ø 280



63

## DOWNLOAD

### MOUNTS

[AssemblyInstructions 745 10-22.pdf](#)

### DESIGNS

[TechnicalDrawing obloj.dxf](#)

